

Keysight Technologies

MXG Signal Generators

Performance optimized
for manufacturing

- Fast switching speeds
- Industry-best ACPR
- Simplified self-maintenance
- Signal Studio software



Keysight Technologies MXG Signal Generators

Making an Impact in Manufacturing



Demands on the production line for communications systems, receivers and components continue to intensify. Keysight Technologies, Inc. MXG signal generators have been optimized specifically to meet the challenges facing manufacturers –throughput, yield, and downtime.

Increasing throughput

With fast switching speeds, Keysight MXG signal generators reduce test time, letting you make more measurements using fewer resources and capital.

Raising test yield

For out-of-channel measurements such as ACPR, the Keysight MXG vector signal generator offers the industry's best dynamic range, reducing error contribution from the stimulus and ultimately improving test margins and yield.

Reducing downtime

Keysight MXG signal generators are made to maximize up-time through reliability and simplified self-maintenance. Starting from a simple design for dependable performance to cost- and time-effective tools for easy onsite maintenance, Keysight MXG is an ideal solution for manufacturers working in today's highly cost sensitive communications industry.

Fastest switching

≤ 1.2 ms in SCPI mode for increased throughput

Superior ACPR

-76 dBc adjacent channel power levels¹ for testing high dynamic range components

Flexible signal creation tools

Proven Signal Studio software with a first-to-market track record

Simplified self-maintenance

Innovative design for easy maintenance and reduced downtime

1. Measured performance for a 1-carrier 3GPP W-CDMA signal (Test Model 1, 64 DPCH) Flexible signal creation tools

A Solution Scalable to Your Needs

In two rack units, the Keysight MXG analog and vector signal generators offer performance that can be tailored for general-purpose applications, cellular communications component manufacturing, or even wireless networking receiver manufacturing. With a choice of frequency ranges, performance attributes, and Signal Studio software, you can scale the Keysight MXG to fit your needs.

General purpose test

With fast switching speeds, outstanding level repeatability and analog modulation, Keysight MXG analog is a reliable stimulus for applications ranging from simulating a clock signal to generating an interferer for receiver evaluation.

Advanced signal simulation

The combination of IQ modulation, superior dynamic range and Signal Studio software, make the Keysight MXG vector ideal for applications up to 6 GHz requiring W-CDMA, cdma2000®/1xEV-DO, GSM/EDGE, TD-SCDMA, WLAN, and Mobile WiMAX™ (802.16-2005 OFDMA) test signals.

A purchase consideration: reliability and cost of ownership

Reliability is often one of the key considerations manufacturing test managers use to make equipment purchases because of the direct connection to downtime. The downtime created by a single piece of test equipment, whether due to maintenance or repair, directly impacts the bottom line, not only in terms of lost throughput, but the cost associated with getting a piece of equipment functioning and back in the test system.

While instrument reliability directly impacts downtime, it is not a complete indication of total cost of ownership. To gain a better understanding on how to minimize these costs, manufacturing managers should consider a broader perspective that includes not only reliability, but also calibration and repair.

The Keysight MXG signal generators are specifically designed with a lower cost of ownership. Driven by reliability and simplified self-maintenance, the Keysight MXGs effectively address the issues associated with the time and cost of calibration and repair.

Keysight MXG at a Glance



Scalable performance

- Frequency coverage from 250 kHz to 6 GHz (operational down to 100 kHz) for cellular and ISM-band communications test
- Accurate analog modulation including AM, FM, ϕ M and pulse modulation for general purpose test
- 100 MHz RF BW internal I/Q baseband generator for flexible signal simulation
- 160 MHz RF BW with external I/Q inputs to up-convert your baseband signals to IF or RF

Improve test yield

- Low distortion with -76 dBc measured ACLR performance for a 1-carrier 3GPP W-CDMA signal¹ to reduce measurement uncertainty

Reduce test time and maximize uptime

- Fast switching speeds, ≤ 1.2 ms in SCPI mode and ≤ 900 μ s simultaneous frequency, amplitude and waveform switching in list mode, to optimize throughput
- Reliable electronic attenuator to 6 GHz provides amplitude switching speed and repeatability

Easy to use

- Color display and familiar Keysight interface make for easy use
- Embedded help system guides new users through basic instrument functions and SCPI commands
- USB port for quick file transfer to flash memory, including Signal Studio waveforms, instrument states, and license keys

1. Test model 1, 64 DPCH


Simplify system integration

- LXI class C compliance helps you efficiently integrate Keysight MXG into your LAN-based test system
- USB, GPIB, and LAN connectivity for remote access
- Tunable reference input from 1 to 50 MHz for frequency locking to your system clock
- 10 MHz reference output provides a stable reference for your test system
- Backward code compatibility makes for fast and easy replacement of Keysight and other signal generators¹



Conserve rack space

- A small 2-rack-unit profile for efficient use of space

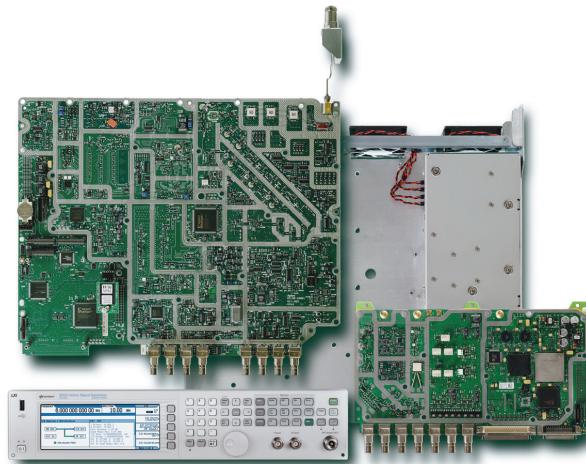

Reliability and easy self-maintenance

- Simple design ensures reliable performance and fast maintenance and repair

1. Code compatible with Keysight E4438C, E4428C, E442XB, E443XB, 8648 series, 8656B, 8657A/B and other signal generators.


Keysight N5181A

MXG Analog Signal Generator

Fast and accurate analog signal generation

Time is critical on the component manufacturing floor. With industry-leading frequency and amplitude switching speeds, the Keysight MXG analog signal generator allows you to reduce test times and maximize throughput. And a flexible option structure lets you scale the Keysight MXG to meet your performance needs from design through production.

Keysight MXG provides the performance required for analog applications ranging from local oscillator substitution to receiver test. It is an accurate and repeatable test stimulus with superior level repeatability, ≤ -121 dBc/Hz phase noise, and an electronic attenuator up to 6 GHz. This enhanced signal quality leads to better measurement certainty, enabling you to improve test yield.

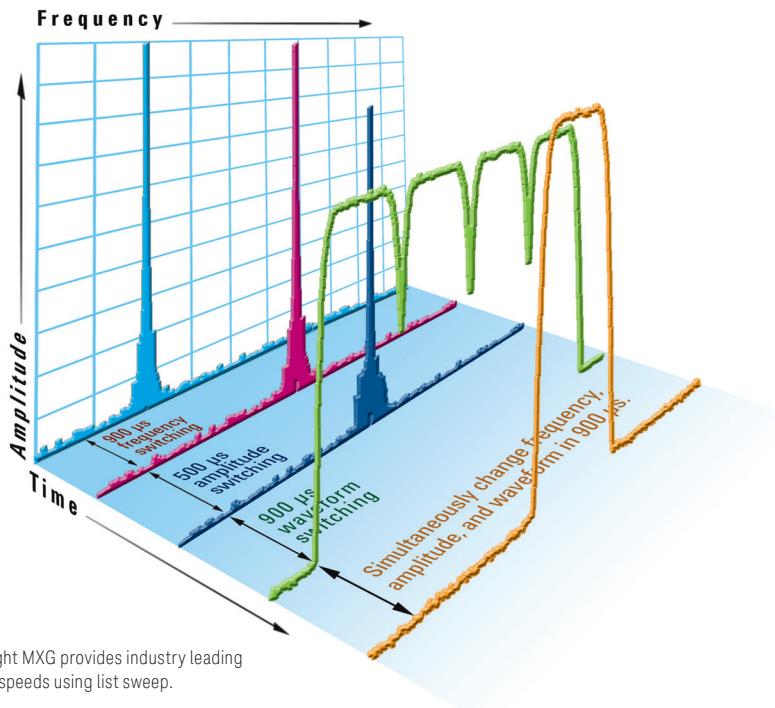

Fastest Switching Engineered for speed

Test times are only as fast as the slowest instrument in your test system. And long test times impact your capacity to build, forcing you to add resources and capital to meet throughput goals. Keysight MXG signal generators reduce the time required to test by providing the fastest switching speeds – at least twice as fast as other signal generators in SCPI mode.

- ≤ 1.2 ms in SCPI mode
- ≤ 900 μ s in list mode

Keysight MXG not only reduces test time, but accelerates the start-up process by offering tools to simplify system configuration.

- LXI class C compliance
- USB, GPIB, and LAN connectivity
- Backward code compatibility with Keysight and other signal generators

Key features

- Frequency range from 250 kHz¹ to 1, 3, or 6 GHz
- -127 to +13 dBm power levels²
- Fast switching speeds
- AM, FM, ϕ M and pulse modulation
- Electronic attenuator
- Backward code compatibility

1. Tunable down to 100 kHz
2. Settable to -144 dBm

Keysight N5182A

MXG Vector Signal Generator

Vector signal generation for component test

For cellular communications and wireless networking, the Keysight MXG vector signal generator adds vector modulation and the industry's best ACPR performance to the speed of the analog model, making it ideal for high-volume component manufacturing. And, with an attractive price point and a scalable option structure, the Keysight MXG vector is a good solution for designing and manufacturing wireless networking receivers.

In addition to fast frequency and amplitude switching times, the Keysight MXG vector also offers the unique ability to simultaneously switch waveforms in $\leq 900 \mu\text{s}$ to further accelerate testing³. A 100 MHz bandwidth internal baseband generator and wideband IQ modulation provide a versatile means of generating complex arbitrary waveforms for communications standards ranging from 3GPP W-CDMA to mobile WiMAX. Keysight MXG vector's performance, combined with Signal Studio software let you confidently verify your design on the lab bench or the production line.



The Keysight MXG provides the best and only specified ACLR performance for a W-CDMA 4-carrier test signal:
–65 dBc specified,
–70 dBc measured¹.

Superior ACPR

Industry's best ACPR for MCPA test

Devices such as MCPAs can generate unwanted signals outside the specified signal bandwidth. These unwanted signals interfere and distort signals in neighboring channels, which can cause bit errors. To improve channel usage, MCPA adjacent channel power levels are being driven lower.

Keysight MXG vector signal generators provide superior dynamic range and the only specified ACLR performance, –65 dBc, for a W-CDMA 4-carrier signal¹. This reduces the error contribution from the test stimulus letting you accurately characterize your device. For manufacturers, better measurement accuracy translates to improved test yield and ultimately a lower cost of test.

Key features

- Frequencies from 250 kHz² to 3 or 6 GHz
- Fast switching speeds, including waveforms³
- Industry-best ACPR
- High-performance baseband generator
 - 100 MHz RF bandwidth
 - 64 MSa waveform playback memory
 - 100 MSa waveform storage memory, extendable with USB flash memory
 - 16 bit DAC resolution
- Electronic attenuator
- Backward code compatibility

1. Test Model 1, 64 DCPH

2. Tunable down to 100 kHz

3. When switching waveforms, other waveform header parameters like sample rate and IQ drive level may be set.


Keysight Signal Studio Software

Verified and optimized reference signals

Signal Studio is a suite of PC-based software designed to reduce the time spent on custom signal creation while enabling you to better characterize your design. Use the software to configure standards-based waveforms for playback with the Keysight MXG vector signal generator. The software provides an intuitive user interface to access pre-defined set-ups or modify signal parameters to create custom reference signals. And, a flexible option structure lets you select the performance you need for the time you need it.

The right applications at the right time

Signal Studio software has a proven first-to-market track record, keeping you on the leading edge of communications standards and continual enhancements keep you current with evolving standards. Use Signal Studio with the Keysight MXG vector and you have flexible, application-specific signal generation.

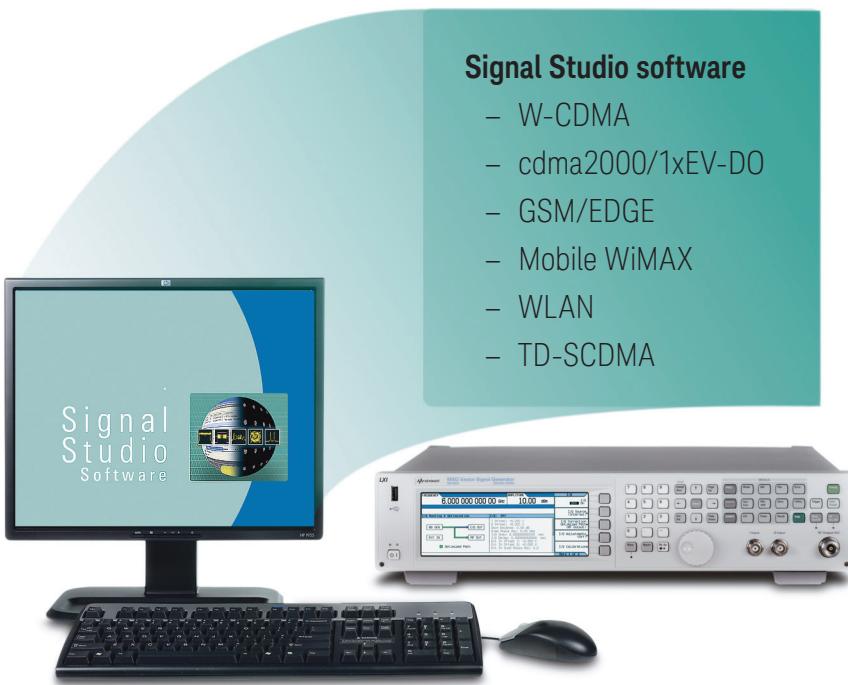

Flexible signal creation tools

Flexible options and licensing

The ability to adapt quickly is paramount on the production line. Signal Studio supports transportable and time-based licensing for the Keysight MXG vector, enabling ultimate flexibility when defining your test system:

- Transportable licenses can be moved from one signal generator to another
- Time-based licensing lets you choose the tools you need only for the time you need it


Signal Studio also provides options to let you pick the level of performance right for your test needs:

- Basic capability provides spectrally correct signals for component test
- Advanced capability adds full channel coding for receiver test

Create test signals for wireless networking

N7615B Signal Studio for 802.16 WiMAX

- Basic and advanced multicarrier 802.16e OFDMA signal creation
- Configure frames for both downlink and uplink
- Access to both physical and basic MAC layer parameters
- Flexible configuration of zones, bursts and MAC PDUs
- Choice of 512, 1024, or 2048 FFT sizes with variable bandwidths
- Built in COM-based API control

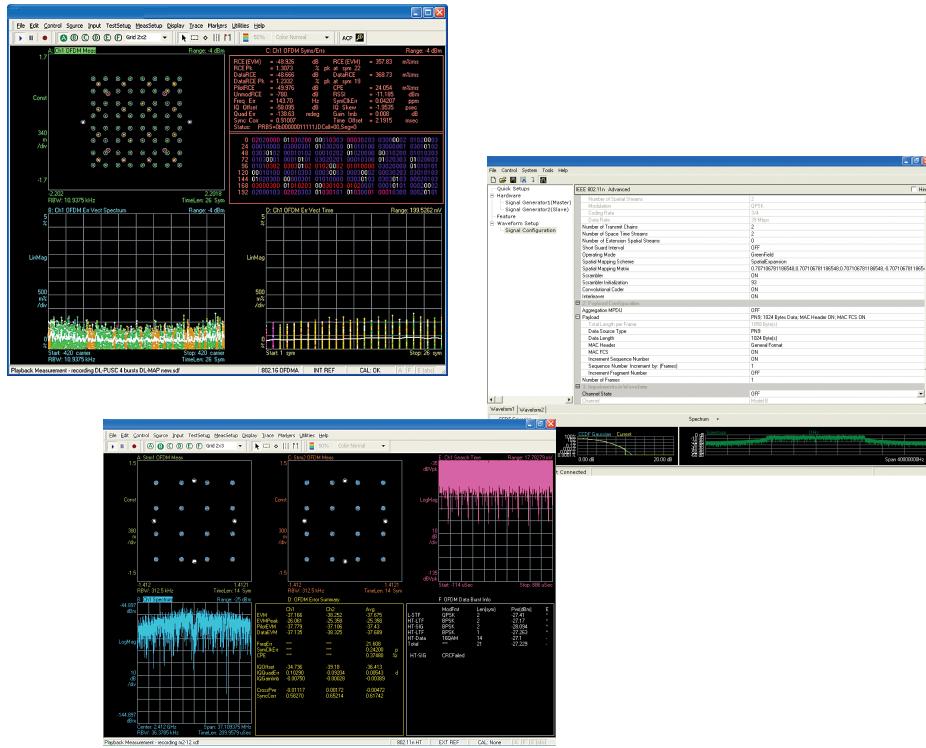

N7617B Signal Studio for 802.11 WLAN

- Basic and advanced 802.11a/b/g/j/p/n signal creation
- Multicarrier 802.11 a/b/g/j/p
- MAC layer configuration and simulation
- Flexible 802.11n transmit link configuration and MIMO channel simulation settings
- Built in COM-based API control

Mobile WiMAX receiver test

The emergence of WiMAX™, and now 802.16e Mobile WiMAX, continues to fuel growth in the broadband wireless access market. R&D engineers developing 802.16e receivers and components need signal generation and analysis tools to verify that their design meets the still-evolving conformance test requirements of the WiMAX Forum®.

Keysight MXG vector with N7615B Signal Studio for 802.16 WiMAX provides standards-based single or multicarrier signals for component test or receiver evaluation, including receiver sensitivity and adjacent channel rejection. With 0.4% typical EVM and -68 dBc typical distortion performance¹, Keysight MXG provides the performance needed to evaluate receiver designs.


To further assist WiMAX developers, Keysight N9020A MXA signal analyzer provides 25 MHz analysis bandwidth for demodulation of WiMAX signals. Combined, Keysight MXG and MXA make a complete and fast WiMAX test system for design and production environments.

1. 802.16e OFDMA 10 MHz bandwidth signal with QPSK modulation at < 7 dB output power. For more information see the Keysight MXG vector data sheet (5989-5261EN).


Configure cellular communications test signals

N7600B Signal Studio for 3GPP W-CDMA FDD

- W-CDMA, HSDPA and HSUPA mixed-signal creation
- Multicarrier configuration including clipping, timing and phase offsets
- Waveform creation including transceiver diversity
- Built in COM-based API control

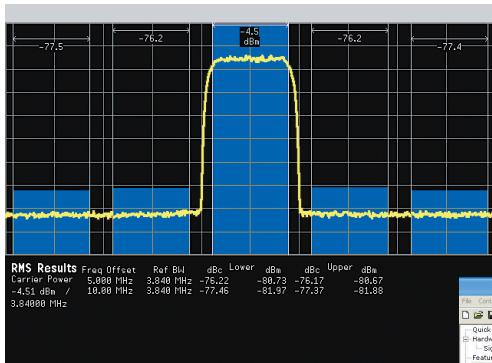

3GPP W-CDMA component test

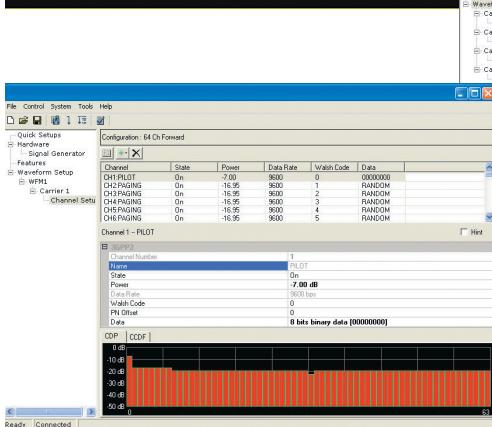

cdma2000 and 1xEV-DO waveforms for power amplifier test

N7601B Signal Studio for 3GPP2 CDMA

- cdma2000, IS95, 1xEV-DO multicarrier mixed-signal creation
- Basic cdma2000 and 1xEV-DO capability for component test
- Advanced 1xEV-DO capability for receiver test
- 1xEV-DO Rev0 reverse link coded signals
- 1xEV-DO RevA reverse and forward link coded signals
- Built in COM-based API control

N7602B Signal Studio for GSM/EDGE


- 3GPP 51010-1 (Mobile) and 3GPP 51021 (base station) coded signals
- Flexible, mixed timeslot SMDK/8PSK formatting
- GSM/EDGE multicarrier creation
- Basic mode GSM/EDGE signal generation for component test
- Built in COM-based API control

N7612B Signal Studio for TD-SCDMA

- Support physical and transport channels for TD-SCDMA and HSDPA
- Pre-coded reference measurement channels
- Multicarrier signal creation
- Flexible channel coding, time slot and frame formatting
- Built in COM-based API control

Try before you buy

Download Signal Studio to a PC and redeem a free 14-day trial license. Investigate the signal creation capabilities of the software prior to purchase. www.keysight.com/find/signalstudio

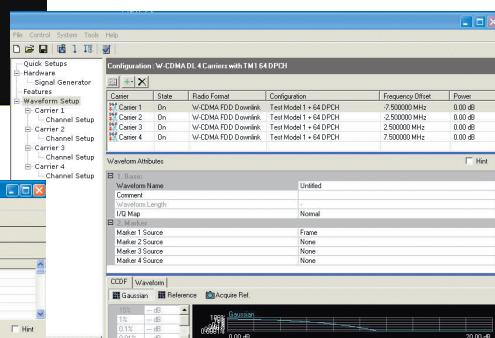

cdma2000 and 1xEV-DO waveforms for power amplifier test

Maximize Uptime on the Manufacturing Line


Designed for long term dependability in production environments with a focus on reliability and simplified-self maintenance, the Keysight MXG helps you maximize uptime and lower cost of ownership. Keysight MXG's architecture, comprised of just five sub-assemblies, increases system integrity without sacrificing performance. It also enables Keysight to offer innovative self-maintenance that reduces potential downtime on your manufacturing line.

Reliability

The Keysight MXG delivers a high level of reliability and therefore overall quality that dramatically reduces the mean time between failures and delivers one of the lowest annual fail rates in the industry. This includes a wear-free electronic attenuator for frequencies up to 6 GHz to ensure fast, repeatable results.

Calibration and repair

The Keysight MXG support strategy lets you decide how to manage your equipment to maximize system uptime. Elect to self-maintain your Keysight MXG – perform calibration and repairs onsite with Keysight calibration software, 100% self diagnostics and field-orderable and replaceable assemblies – and ensure a fast return to the production line. Alternatively elect to have maintenance done through one of Keysight's local service centers to keep your Keysight MXG signal generator performing like new.

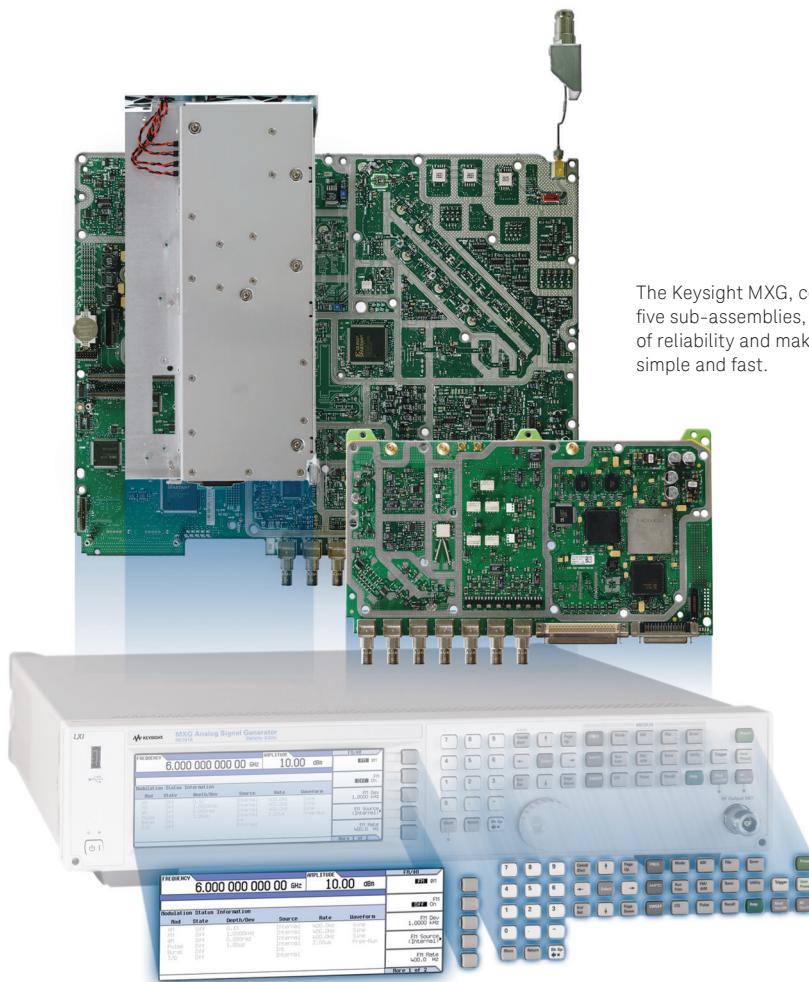

The Keysight MXG, comprised of just five sub-assemblies, delivers a high level of reliability and makes self-maintenance simple and fast.

Simplified self-maintenance

What is simplified self-maintenance?

Simplified self-maintenance for the Keysight MXG is an alternative to traditional maintenance and repair choices. Maintaining the MXG in-house empowers you to actively manage downtime, while maximizing uptime and reducing your total cost of ownership.

Quick calibration




Using a spectrum analyzer, a power meter, and Keysight's calibration software, you can verify the performance of the Keysight MXG down to -110 dBm in less than 1 hour.

Onsite repair

Should a failure occur, the Keysight MXG is quick and easy to repair. Repair assemblies are field-orderable and come fully adjusted and certified. Onsite repair can be done in as little as 30 minutes.

Specification Summary¹

Frequency range		
N5181A	250 kHz ² to 1, 3, or	
N5182A	6 GHz	
Switching speed		
Frequency	Standard	Option UNZ
SCPI mode	≤ 5 ms	≤ 1.15 µs
List mode	≤ 5 ms	≤ 900 µs
Amplitude		
SCPI mode	≤ 5 ms	≤ 750 µs
List mode	≤ 5 ms	≤ 500 µs
Amplitude		
Range	Standard	Option 1EQ³
250 kHz to 2.5 GHz	-110 to +13 dBm	-127 to +13 dBm
> 2.5 to 3.0 GHz	-110 to +10 dBm	-127 to +10 dBm
> 3.0 to 4.5 GHz	-110 to +13 dBm	-127 to +13 dBm
> 4.5 to 5.8 GHz	-110 to +10 dBm	-127 to +10 dBm
> 5.8 to 6.0 GHz	-110 to +7 dBm	-127 to +7 dBm
Absolute level accuracy for CW signals (-60 to +7 dBm, within 20 to 30 °C)		
250 kHz to 1 MHz	± 0.5 dB	
> 1 MHz to 1 GHz	± 0.6 dB	
> 1 to 3 GHz	± 0.7 dB	
> 3 to 6 GHz	± 0.8 dB	
Single sideband phase noise (typical at 20 kHz offset)		
500 MHz	≤ -126 dBc/Hz	
1 GHz	≤ -121 dBc/Hz	
2 GHz	≤ -115 dBc/Hz	
3 GHz	≤ -110 dBc/Hz	
6 GHz	≤ -104 dBc/Hz	
Harmonics (CW mode, output level < 4 dBm)		
≤ 3 GHz	< -30 dBc	
> 3 to 6 GHz	< -44 dBc (typ)	
Analog modulation		
AM	Depth	90%
FM	Maximum deviation	20 MHz (nom)
φM	(6 GHz)	
Pulse modulation	Maximum deviation	20 radians
	(6 GHz)	
	Rise/fall time	< 50 ns (typ)
	Minimum pulse	≥ 500 ns (ALC off)
	width	
	On/Off ratio	> 80 dB (typ)

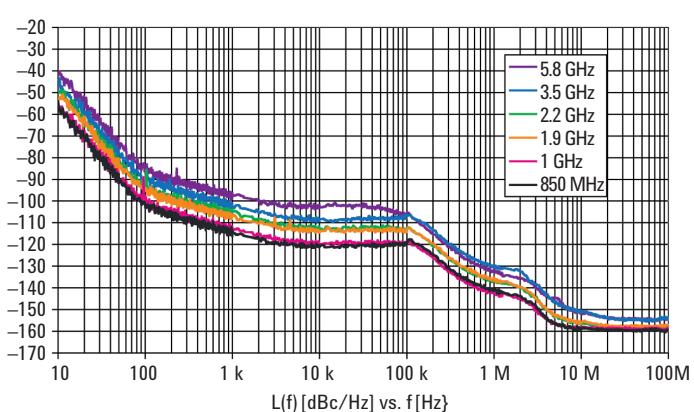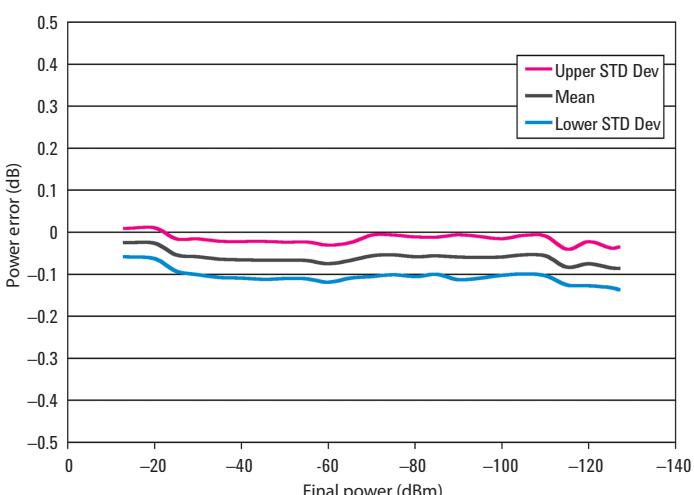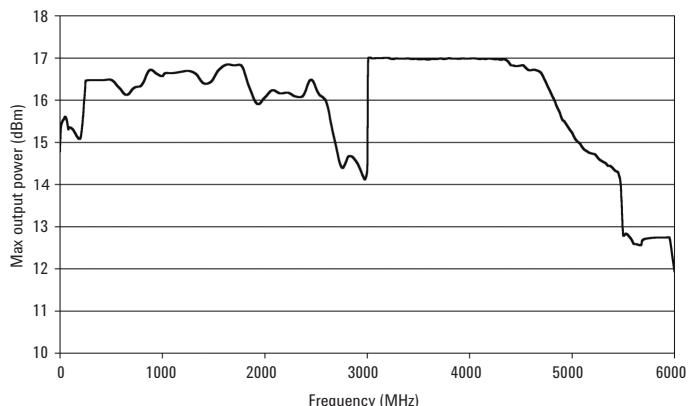

1. Specifications subject to change. For detailed specifications refer to the data sheets (analog: 5989-5311EN; vector: 5989-5261EN).
2. Tunable to 100 kHz.
3. Settable down to -144 dBm.

Additional Vector Specifications¹


Baseband generator features

(Options 651, 652, 654)


Maximum playback capacity	8 MSa, 64 MSa Option 019
Sample rate	1 kSa/s to 30, 60, or 125 MSa/s
Bandwidth	24, 48, or 100 MHz
Effective DAC resolution	11 bits (standard) or 16 bits#(Option UNV)
Waveform switching in list sweep mode	Standard ≤ 5 ms Option UNZ ≤ 900 µs (typ)

Typical ACPR and EVM performance data²


Format	ACPR (Option UNV)	EVM
GSM	-86 dBc	rms 0.2° peak 0.6°
EDGE	-85 dBc	0.7%
cdma2000/1xEV-DO	-93 dBc	1.3%
W-CDMA		
1-carrier	-73 dBc -76 dBc (meas) -71 dBc (spec)	0.8%
4-carrier	-67 dBc# -70 dBc (meas) -65 dBc (spec)	0.8%
802.11a/g	—	0.5%
WiMAX	-68 dBc	0.4%
QPSK	—	0.8%
16QAM	—	0.6%

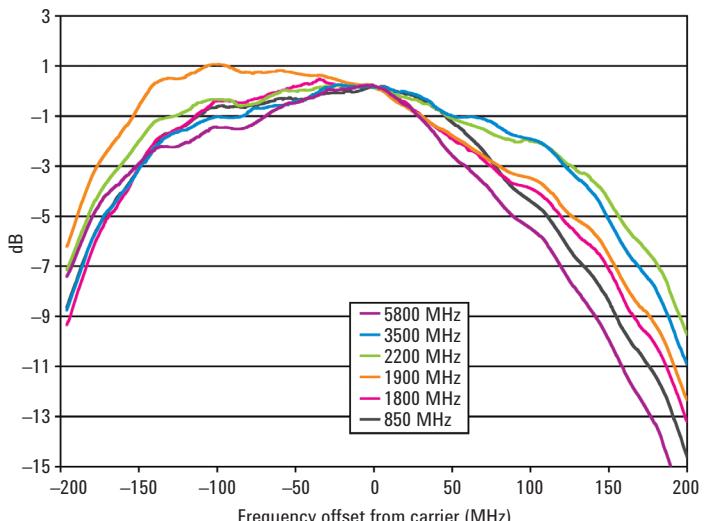

Bandwidth of IQ modulator using external I/Q source (ALC off)

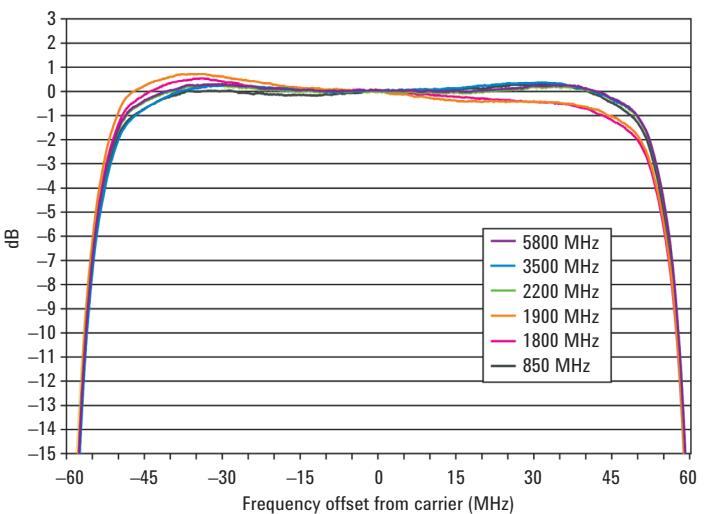

I/Q bandwidth of optional internal baseband generator

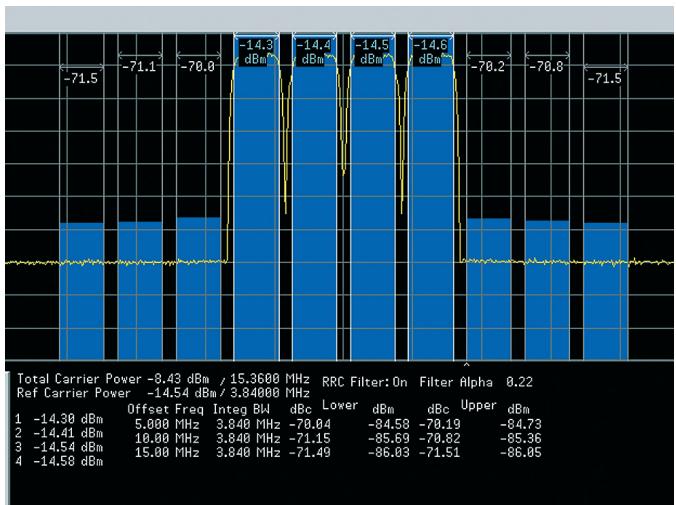

4-carrier 3GPP W-CDMA signal with Test Model 1, 64 DPCH

1. Specifications are subject to change. For detailed specifications, refer to the vector data sheet (5989-5261EN).
2. Values provided are typical (unless indicated otherwise) for specific signal configurations. For detailed specifications, please refer to the data sheet.

Ordering Information

Keysight N5181A MXG analog signal generator

Frequency options	
501	250 kHz to 1 GHz
503	250 kHz to 3 GHz
506	250 kHz to 6 GHz
Performance options	
UNZ	Fast switching
1EQ	Low power
UNT	AM, FM, φM
UNU	Pulse modulation
Other options	
006	Instrument security
1EM	Move RF output to rear panel
1ER	Flexible reference input (1 to 50 MHz)
UK6	Commercial calibration certificate

Keysight N5182A MXG vector signal generator

Frequency options	
503	250 kHz to 3 GHz
506	250 kHz to 6 GHz
Performance options	
UNZ	Fast switching
1EQ	Low power
UNT	AM, FM, φM
UNU	Pulse modulation
UNV	Enhanced dynamic range
Other options	
006	Instrument security
1ER	Flexible reference input (1 to 50 MHz)
1EM	Move RF output to rear panel
UK6	Commercial calibration certificate
Baseband generator options	
651	Internal baseband generator (30 MSa/s, 8 MSa)
652	Internal baseband generator (60 MSa/s, 8 MSa)
654	Internal baseband generator (125 MSa/s, 8 MSa)
019	Increase baseband generator memory to 64 MSa
1EL	Differential I/Q outputs
403	Calibrated AWGN
Signal Studio software	
N7600B	Signal Studio for 3GPP W-CDMA FDD
N7601B	Signal Studio for 3GPP CDMA
N7602B	Signal Studio for GSM/EDGE
N7612B	Signal Studio for TD-SCDMA
N7615B	Signal Studio for 802.16 WiMAX
N7617B	Signal Studio for 802.11 WLAN

Explore the Keysight MXG online

Access the latest product literature, application notes, options, and pricing. Or request a quick quote. Visit: www.keysight.com/find/mxg

The Keysight MXG Whole Product Solution

Pre-sales services...

including rentals, leasing, financing and trade-up programs make the purchasing process hassle free.
www.keysight.com/find/financial_solutions



Post-sales support...

includes worldwide call centers, and free firmware upgrades for more capabilities.

Start-up assistance...

helps you get on track quickly and Keysight literature keeps you up-to-date on the latest technology.
www.keysight.com/find/training

LXI class C compliant LAN interface...

simplifies system integration. USB and GPIB connectors provide universal connectivity.
www.keysight.com/find/lxi

Keysight service centers...

When self-maintenance does not meet your needs, use Keysight worldwide service centers to keep your Keysight MXG performing like new. Have it repaired and calibrated by the company that made it. Only Keysight can ensure that your equipment maintains its highest levels of performance with prompt turnaround time.
www.keysight.com/find/removealldoubt

Additional Resources

Literature

*Keysight Technologies N5181A
MXG Analog Signal Generator, Data Sheet, 5989-5311EN*

*Keysight Technologies N5182A
MXG Vector Signal Generator, Data Sheet, 5989-5261EN*

Keysight Technologies MXG Signal Generators, Configuration Guide, 5989-5485EN

Accurate Amplifier ACLR and ACPR Testing with the Keysight MXG Vector Signal Generator, Application Note, 5989-5471EN


Improving Throughput with Fast RF Signal Generator Switching, Application Note, 5989-5487EN

Web

For more information or to view product literature on-line, please visit:
www.keysight.com/find/mgx

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.
From Hewlett-Packard to Agilent to Keysight.



myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

http://www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.



Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.

Keysight Assurance Plans

www.keysight.com/find/AccuracyPlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

WiMAX, Mobile WiMAX, WiMAX Forum, the WiMAX Forum logo, WiMAX Forum Certified, and the WiMAX Forum Certified logo are US trademarks of the WiMAX Forum.

www.keysight.com/find/mgx

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:

www.keysight.com/find/contactus
(BP-9-7-17)

DEKRA Certified

ISO9001 Quality Management System

www.keysight.com/go/quality
Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System