

R&S®FSMR

Measuring Receiver

Specifications



CONTENTS

Specifications	3
Frequency	3
Measuring receiver	3
Frequency counter	3
RF power	4
RF level (tuned receiver)	5
Modulation	7
Audio	10
Spectrum analyzer	12
Frequency	12
Sweep	13
Resolution bandwidths	13
Level	14
I/Q data	17
Audio demodulation	17
General	18
Trigger functions	18
Inputs and outputs (front panel)	18
Inputs and outputs (rear panel)	20
General data	21
Options	22
R&S®FSMR-B2 YIG preselection (for the R&S®FSMR26/43/50), R&S®FSMR-B223 YIG preselection with 20 dB preamplifier (for the R&S®FSMR26 only, requires the R&S®FSU-B25 option)	22
R&S®FSU-B9 tracking generator, R&S®FSU-B12 step attenuator for tracking generator	25
R&S®FSMR-B23 RF preamplifier (for the R&S®FSMR26 only, requires the R&S®FSU-B25 option)	27
R&S®FSU-B24 30 dB RF preamplifier (for the R&S®FSMR26/43/50)	28
R&S®FSU-B25 electronic attenuator and preamplifier	32
Accessories	33
R&S®NRP-Z27/-Z37 power sensor modules	33
R&S®FSMR-Z2 attenuation calibration kit	35
Ordering information	36
Base unit	36
Hardware options	36
Software options	37
Accessories	37
Recommended extras	38

Specifications

Specifications apply under the following conditions: 30 minutes warm-up time at ambient temperature (60 minutes for RF level), specified environmental conditions met, calibration cycle adhered to, and total calibration performed. Data without tolerance limit is not binding. Data designated 'nominal' applies to design parameters and is not tested. Accuracy does not include mismatch error and errors due to standard deviation of the measurement readings, which are influenced by the number of averages.

Frequency

Frequency range	R&S®FSMR3:	DC-coupled	20 Hz to 3.6 GHz
		AC-coupled	1 MHz to 3.6 GHz
	R&S®FSMR26:	DC-coupled	20 Hz to 26.5 GHz
		AC-coupled	10 MHz to 26.5 GHz
	R&S®FSMR43:	DC-coupled	20 Hz to 43 GHz
	R&S®FSMR50:	DC-coupled	20 Hz to 50 GHz
Internal timebase			
Reference frequency, internal, nominal			
Aging per day	after 30 days of continuous operation	1×10^{-9}	
Aging per year	after 30 days of continuous operation	1×10^{-7}	
Temperature drift	+5 °C to +45 °C	8×10^{-8}	
Total error	per year	1.8×10^{-7}	
Reference frequency, internal, nominal			
R&S®FSU-B4 option			
Aging per day	after 30 days of continuous operation	2×10^{-10}	
Aging per year	after 30 days of continuous operation	3×10^{-8}	
Temperature drift	+5 °C to +45 °C	1×10^{-9}	
Total error	per year	5×10^{-8}	
External reference frequency		1 MHz to 20 MHz, 1 Hz steps	

Measuring receiver

Frequency counter

Frequency range	R&S®FSMR3	20 Hz to 3.6 GHz
	R&S®FSMR26	20 Hz to 26.5 GHz
	R&S®FSMR43	20 Hz to 43 GHz
	R&S®FSMR50	20 Hz to 50 GHz
Frequency display		frequency offset
Sensitivity	10 kHz to 26.5 GHz	-120 dBm
	26.5 GHz to 50 GHz	-100 dBm
Maximum frequency counter resolution		0.001 Hz
Count accuracy	S/N > 25 dB	$\pm(\text{frequency} \times \text{reference accuracy} + 0.1 \text{ Hz})$

RF power

The R&S®FSMR performs absolute RF power measurements when the R&S®NRP-Zxx power sensors are connected to the R&S®FSMR.

The R&S®NRP-Z27 and R&S®NRP-Z37 power sensor modules include a power splitter. All specifications in this section describe a setup where the RF output of the R&S®NRP-Z27/-Z37 power sensor module is connected to the RF input of the R&S®FSMR. For specifications of the R&S®NRP-Z27/-Z37, see the “Accessories” section and the R&S®NRP2 and R&S®NRP-Zxx data sheet (PD 5213.5539.22).

For specifications of the other R&S®NRP-Zxx power sensors, see the R&S®NRP2 and R&S®NRP-Zxx data sheet (PD 5213.5539.22).

RF frequency range, level range	power sensor type and connector thermoelectric power sensors		frequency range	level range
R&S®NRP-Z27	N male with int. splitter	DC to 18 GHz	–24 dBm to +26 dBm	
R&S®NRP-Z37	3.5 mm male with int. splitter	DC to 26.5 GHz	–24 dBm to +26 dBm	
R&S®NRP-Z51	N male	DC to 18 GHz	–30 dBm to +20 dBm	
R&S®NRP-Z55	2.92 mm male	DC to 40 GHz	–30 dBm to +20 dBm	
diode power sensors				
R&S®NRP-Z11	N male	10 MHz to 8 GHz	–67 dBm to +23 dBm	
R&S®NRP-Z21	N male	10 MHz to 18 GHz	–67 dBm to +23 dBm	
R&S®NRP-Z22	N male, int. attenuator	10 MHz to 18 GHz	–57 dBm to +33 dBm	
R&S®NRP-Z23	N male, int. attenuator	10 MHz to 18 GHz	–47 dBm to +42 dBm	
R&S®NRP-Z24	N male, int. attenuator	10 MHz to 18 GHz	–42 dBm to +45 dBm	
R&S®NRP-Z81	N male	50 MHz to 18 GHz	–60 dBm to +20 dBm	
R&S®NRP-Z91	N male	9 kHz to 6 GHz	–67 dBm to +23 dBm	
RF power accuracy	R&S®FSMR with R&S®NRP-Z27/-Z37 power sensor module, input level: –10 dBm to +26 dBm		temperature range: +15 °C to +35 °C	temperature range: 0 °C to +50 °C
	DC to 4.2 GHz	0.083 dB	0.107 dB	
	> 4.2 GHz to 8 GHz	0.099 dB	0.123 dB	
	> 8 GHz to 12.4 GHz	0.107 dB	0.135 dB	
	> 12.4 GHz to 18 GHz	0.130 dB	0.159 dB	
	> 18 GHz to 26.5 GHz	0.167 dB	0.212 dB	
	without numeric isolation correction (VSWR correction OFF)		temperature range: +15 °C to +35 °C	temperature range: 0 °C to +50 °C
	DC to 4.2 GHz	0.120 dB	0.138 dB	
	> 4.2 GHz to 8 GHz	0.166 dB	0.181 dB	
	> 12.4 GHz to 18 GHz	0.187 dB	0.207 dB	
	> 18 GHz to 26.5 GHz	0.235 dB	0.269 dB	
RF power resolution	0.001 dB			
Instrumentation accuracy	not applicable			
RF range-to-range error	not applicable			
Max. power	average		0.5 W (+27 dBm) continuous	
			1.0 W (+30 dBm) for max. 10 minutes	
	pulse energy		30 µWs	
Input VSWR	RF signal output of the R&S®NRP-Z27/-Z37 connected to the R&S®FSMR RF input		R&S®NRP-Z27	R&S®NRP-Z37
	DC to 2 GHz	< 1.15	< 1.15	
	> 2 GHz to 4.2 GHz	< 1.18	< 1.18	
	> 4.2 GHz to 8 GHz	< 1.23	< 1.23	
	> 8 GHz to 12.4 GHz	< 1.25	< 1.25	
	> 12.4 GHz to 18 GHz	< 1.38	< 1.30	
	> 18 GHz to 26.5 GHz		< 1.45	
Zero offset	expanded uncertainty ($k = 2$) after zeroing		< 400 nW (typ. 160 nW)	
Zero drift of meter	not applicable			
Display noise	two standard deviations, 10.24 s integration time		< 240 nW (typ. 120 nW)	
Zero drift of sensor	within 1 hour after zeroing, permissible temperature change ± 1 °C, following two-hour warm-up of power sensor		< 160 nW	
Power range of the R&S®FSMR with the R&S®NRP-Z27/-Z37 power sensor module			–24 dBm (4 µW) to +26 dBm (400 mW); –24 dBm to +30 dBm (1 W) for max. 10 minutes, one range without subranges	
Response time	100 ms × number of averages (nom.)			
Display units	absolute mode		dBm, W	
	relative mode		dB, %	

RF level (tuned receiver)

Frequency range	R&S®FSMR3 R&S®FSMR26 R&S®FSMR43 R&S®FSMR50	100 kHz to 3.6 GHz 100 kHz to 26.5 GHz 100 kHz to 43 GHz 100 kHz to 50 GHz
Display resolution		0.001 dB in absolute and relative mode
Display units	absolute mode relative mode	dBm dB
Input VSWR	R&S®NRP-Z27/-Z37 connected base instrument without power sensor module	see "RF power" section see "Inputs and outputs" section
Measurement time		500 ms (nom.) for single measurement

Relative level measurement

Frequency range	R&S®FSMR3 R&S®FSMR26 R&S®FSMR43 R&S®FSMR50	100 kHz to 3.6 GHz 100 kHz to 26.5 GHz 100 kHz to 43 GHz 100 kHz to 50 GHz
Level range	RF, R&S®FSMR RF input 100 kHz to 10 MHz 10 MHz to 3.6 GHz without preamplifier with preamplifier (R&S®FSU-B25 option) 3.6 GHz to 26.5 GHz 26.5 GHz to 50 GHz	+30 dBm to -120 dBm +30 dBm to -130 dBm +30 dBm to -140 dBm +30 dBm to -130 dBm +30 dBm to -120 dBm
Linearity	input level: +20 dBm to -140 dBm	±0.01 dB ± 0.005 dB per 10 dB step
Range-to-range error	applies to RF range changes; the R&S®FSMR performs RF range changes at input levels of approx. -40 dBm and 0 dBm RF: 100 kHz to 22 GHz 22 GHz to 40 GHz 40 GHz to 50 GHz	0.005 dB 0.015 dB 0.045 dB

Absolute level measurement

The R&S®FSMR performs absolute RF level measurements when the R&S®NRP-Zxx power sensors are connected to the R&S®FSMR.

The R&S®NRP-Z27 and R&S®NRP-Z37 power sensor modules include a power splitter. All specifications in this section describe a setup where the RF output of the R&S®NRP-Z27/-Z37 power sensor module is connected to the RF input of the R&S®FSMR. For specifications of the R&S®NRP-Z27/-Z37, see the “Accessories” section and the R&S®NRP2 and R&S®NRP-Zxx data sheet (PD 5213.5539.22).

Level range	RF, R&S®NRP-Z27/-Z37 RF input	
	100 kHz to 10 MHz	+30 dBm to –110 dBm
	10 MHz to 3.6 GHz	
	without preamplifier	+30 dBm to –120 dBm
	with preamplifier (R&S®FSU-B25 option)	+30 dBm to –130 dBm
	3.6 GHz to 26.5 GHz	+30 dBm to –120 dBm
	26.5 GHz to 50 GHz	+30 dBm to –110 dBm
Accuracy	R&S®FSMR with R&S®NRP-Z27/-Z37 power sensor module, temperature range: +15 °C to +35 °C	
	RF: 100 kHz to 4.2 GHz	
	–130 dBm to +26 dBm	±0.083 dB ± 0.005 dB per 10 dB step
	+26 dBm to +30 dBm	±0.102 dB ± 0.005 dB per 10 dB step
	RF: 4.2 GHz to 8 GHz	
	–120 dBm to +26 dBm	±0.099 dB ± 0.005 dB per 10 dB step
	+26 dBm to +30 dBm	±0.144 dB ± 0.005 dB per 10 dB step
	RF: 8 GHz to 12.4 GHz	
	–120 dBm to +26 dBm	±0.107 dB ± 0.005 dB per 10 dB step
	+26 dBm to +30 dBm	±0.144 dB ± 0.005 dB per 10 dB step
	RF: 12.4 GHz to 18 GHz	
	–120 dBm to +26 dBm	±0.130 dB ± 0.005 dB per 10 dB step
	+26 dBm to +30 dBm	±0.144 dB ± 0.005 dB per 10 dB step
	RF: 18 GHz to 26.5 GHz	
	–120 dBm to +26 dBm	±0.167 dB ± 0.005 dB per 10 dB step
	+26 dBm to +30 dBm	±0.178 dB ± 0.005 dB per 10 dB step
Range-to-range error	applies to RF range changes; the R&S®FSMR performs RF range changes at input levels of approx. –40 dBm and 0 dBm	
	RF:	
	100 kHz to 22 GHz	0.005 dB
	22 GHz to 40 GHz	0.015 dB
	40 GHz to 50 GHz	0.045 dB

Modulation

Amplitude modulation (AM)

Input level range	RF: 100 kHz to 50 GHz	-40 dBm to +30 dBm
Modulation depth range	RF: 100 kHz to 50 GHz	0 % to 100 %
Modulation depth uncertainty		
Absolute	depth of modulation: 5 % to 99 % RF modulation rate 100 kHz to 10 MHz 10 Hz to 10 kHz ¹ < 1.5 % of reading ≥ 10 MHz 10 Hz to 50 kHz ² < 1 % of reading 50 kHz to 100 kHz < 1.5 % of reading 90 Hz to 150 Hz < 0.4 % of reading	(residual AM not included)
Flatness, referenced to 1 kHz	RF modulation rate 100 kHz to 10 MHz 10 Hz to 10 kHz ¹ < 0.3 % of reading ≥ 10 MHz 10 Hz to 50 kHz ² < 0.3 % of reading 50 kHz to 100 kHz < 0.8 % of reading	
FM rejection	modulation rate: 400 Hz/1 kHz, measurement bandwidth: 3 kHz RF FM deviation 100 kHz to 10 MHz 5 kHz < 0.2 % (nom.) ≥ 10 MHz 50 kHz < 0.2 % (nom.)	
Residual AM	measurement bandwidth: 3 kHz detector: RMS RF ≥ 100 kHz mixer level ≥ -15 dBm	< 0.01 %
Harmonic distortion		
Total harmonic distortion of demodulated signal	measurement bandwidth: 250 kHz or 10th harmonic, whichever is lower; depth of modulation: 5 % to 99 % RF modulation rate 100 kHz to 10 MHz 50 Hz to 10 kHz < 0.3 % (-50.5 dB) ≥ 10 MHz 50 Hz to 100 kHz < 0.3 % (-50.5 dB)	
Distortion measurement		see "Audio: Distortion and noise" section
Detectors		+Peak, -Peak, ±Peak/2, RMS, AVG (RMS sine wave calibrated)

¹ Modulation rates ≥ 50 Hz with default settings, ≥ 10 Hz with meas. time ≥ 400 ms.

² Modulation rates ≥ 50 Hz with default settings, ≥ 10 Hz with meas. time = 400 ms and demodulation bandwidth = 800 kHz.

Frequency modulation (FM)


Input level range	RF: 100 kHz to 50 GHz	-40 dBm to +30 dBm
Modulation rate range	RF: 100 kHz to < 10 MHz	10 Hz to 10 kHz ³
	RF: 10 MHz to 50 GHz	10 Hz to 5 MHz ⁴
Modulation deviation range	RF: 100 kHz to < 10 MHz	max. 50 kHz (peak)
	RF: 10 MHz to 50 GHz	max. 5 MHz (peak)
FM deviation uncertainty	RF deviation (peak)	
	200 kHz to 10 MHz 50 kHz	
	≥ 10 MHz 500 kHz	
	(residual FM not included)	
	RF modulation rate	
	200 kHz to 10 MHz 10 Hz to 10 kHz	< 1 %
	≥ 10 MHz 10 Hz to 100 kHz	< 1 %
		100 kHz to 200 kHz < 3 %
AM rejection	modulation rate: 400 Hz/1 kHz measurement bandwidth: 3 kHz AM modulation depth: 50 % RF ≥ 200 kHz	< 20 Hz (nom.)

Residual FM	measurement bandwidth: 3 kHz, detector: RMS	
	RF: 300 kHz to 1 GHz	< 1 Hz
	RF: 1 GHz to 18 GHz	< (0.25 + 0.75 × RF/GHz) Hz
Harmonic distortion		
Total harmonic distortion of demodulated signal	measurement bandwidth: 250 kHz or 10th harmonic, whichever is lower	
	RF: 200 kHz to 10 MHz	
	modulation rate: 50 Hz to 10 kHz	
	deviation	< 10 kHz < 0.1 % (-60 dB)
		< 50 kHz < 0.3 % (-50.5 dB)
	RF ≥ 10 MHz	
	modulation rate: 50 Hz to 100 kHz	
	deviation	< 100 kHz < 0.1 % (-60 dB) < 500 kHz < 0.3 % (-50.5 dB)
Distortion measurement	see "Audio: Distortion and noise" section	
Detectors	+Peak, -Peak, ±Peak/2, RMS, AVG (RMS sine wave calibrated)	

³ Modulation rates ≥ 50 Hz with default settings, ≥ 10 Hz with meas. time ≥ 400 ms.⁴ Modulation rates ≥ 50 Hz with default settings, ≥ 10 Hz with meas. time = 400 ms and demodulation bandwidth = 800 kHz.

Phase modulation (ϕM)

Input level range	RF: 100 kHz to 50 GHz	-40 dBm to +30 dBm
Modulation rate range	RF: 100 kHz to < 10 MHz	10 Hz to 10 kHz
	RF: 10 MHz to 50 GHz	10 Hz to 5 MHz
ϕM deviation range	RF: 200 kHz to 10 MHz	max. 1000 rad, depends on mod. rate
	RF: ≥ 10 MHz	max. 10000 rad, depends on mod. rate

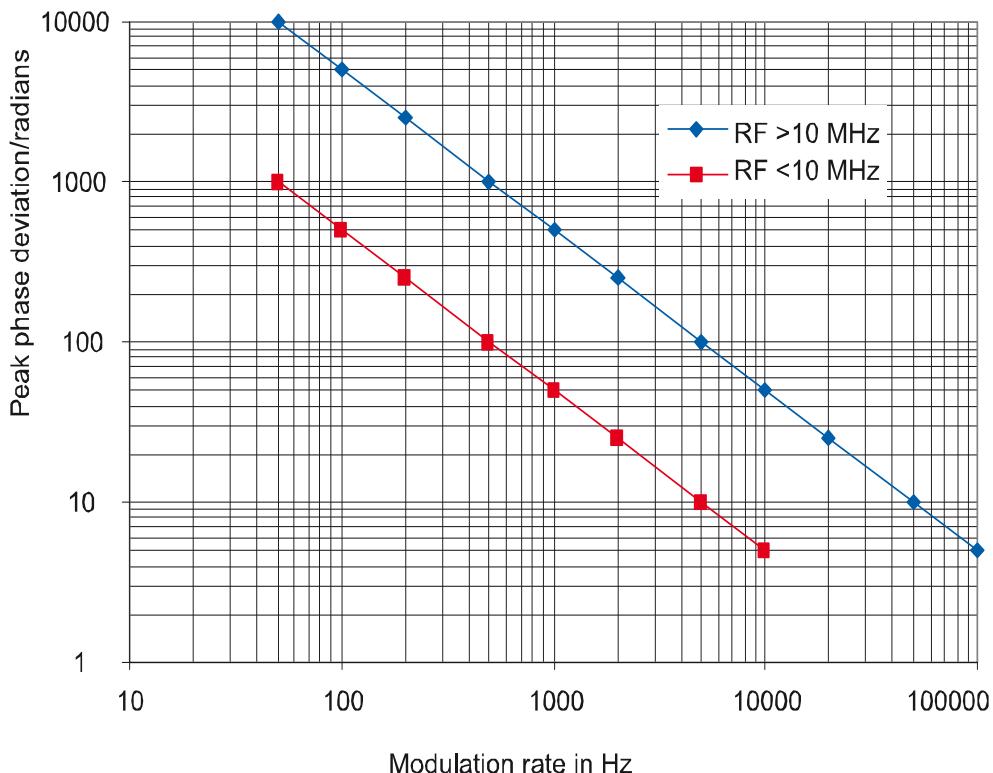*Maximum phase deviation.*

ϕM deviation uncertainty	RF	modulation rate	(residual ϕM not included)
	200 kHz to 10 MHz	50 Hz to 10 kHz	< 1 %
	≥ 10 MHz	50 Hz to 100 kHz	< 1 %
AM rejection	modulation rate: 400 Hz/1 kHz measurement bandwidth: 3 kHz AM modulation depth: 50 % RF \geq 200 kHz		< 0.02 rad (nom.)
Residual ϕM	measurement bandwidth: 100 kHz detector: RMS RF = 1 GHz		typ. 0.003 rad
Harmonic distortion			
Total harmonic distortion of demodulated signal	measurement bandwidth: 250 kHz or 10th harmonic, whichever is lower RF: 200 kHz to 10 MHz		
	modulation rate 50 Hz to 10 kHz	< 0.1 % (-60 dB)	
	RF \geq 10 MHz		
	modulation rate 50 Hz to 100 kHz	< 0.1 % (-60 dB)	
Distortion measurement			see "Audio: Distortion and noise" section
Detectors			+Peak, -Peak, \pm Peak/2, RMS, AVG (RMS sine wave calibrated)

Audio

Audio input characteristics

Input impedance	selectable	50 Ω/1 MΩ (nom.)
Maximum ratings	50 Ω input impedance, max. power	< 1 W
	1 MΩ input impedance, max. peak voltage	< 20 V
Ranges		2
Full-scale RMS voltage (sine wave)	4 V range	> 3 V (typ. 4 V)
	0.4 V range	> 300 mV (typ. 400 mV)
Accuracy, DC voltage	4 V range	< 0.5 % of reading ± 5 mV
	0.4 V range	< 0.5 % of reading ± 1 mV
Accuracy, AC voltage		
Sine wave, RMS reading	specifications apply from full scale to 10 % of full scale, min. 100 mV	
	20 Hz to 100 kHz	< 1 % of reading
	100 kHz to 300 kHz	< 2 % of reading
	300 kHz to 1 MHz	< 5 %, typ. < 3 % of reading
Residual noise	measurement bandwidth: 100 kHz, RMS detector	
	4 V range	< 250 μV
	0.4 V range	< 25 μV
Harmonic distortion		
Inherent total harmonic distortion	measurement bandwidth: 250 kHz or 10th harmonic, whichever is lower; fundamental frequency: 100 Hz to 100 kHz	
	4 V range: from full scale to 600 mV 600 mV to 300 mV	< 0.1 % (-60 dB) < 0.2 % (-54 dB)
	0.4 V range: from full scale to 100 mV	< 0.1 % (-60 dB)

Distortion and noise

The distortion and noise measurement is applicable to the demodulated signal and to signals fed into the audio input.

Distortion measurement		
Distortion display range		0.001 % to 100 % (-100 dB to 0 dB)
THD measurement uncertainty	measurement bandwidth: 250 kHz or 10th harmonic, whichever is lower; fundamental frequency: 100 Hz to 100 kHz	< 0.5 dB, typ. 0.2 dB
SINAD measurement		
SINAD display range		100 dB to 0 dB
SINAD measurement uncertainty	measurement bandwidth: 100 Hz to 250 kHz, number of harmonics ≤ 10	< 0.5 dB

Audio frequency counter

The AF counter is applicable to the demodulated signal and to signals fed into the audio input.

Frequency range		20 Hz to 250 kHz
Sensitivity	audio input signal	5 mV
Resolution		6 digits
Uncertainty	input RMS voltage	> 100 mV
	f < 1 kHz	±0.02 Hz ± f × reference oscillator uncertainty
	f ≥ 1 kHz	±3 counts of least significant digit ±f × reference oscillator uncertainty

Audio filters


The audio filters are applicable to the demodulated signal and to signals fed into the audio input.

Lowpass filters		
3 kHz	flatness \leq 1 kHz	< 1 %
	-3 dB roll-off	3 kHz (nom.)
	slope	30 dB/octave
15 kHz	flatness \leq 10 kHz	< 1 %
	-3 dB roll-off	15 kHz (nom.)
	slope	30 dB/octave
23 kHz	flatness \leq 15 kHz	< 1 %
	-3 dB roll-off	23 kHz (nom.)
	slope	30 dB/octave
100 kHz	flatness \leq 10 kHz	< 1 %
	-3 dB roll-off	100 kHz (nom.)
	filter type	9-pole Bessel
Highpass filters		
20 Hz	flatness \geq 50 Hz	< 1 %
	-3 dB roll-off	20 Hz (nom.)
	slope	18 dB/octave
50 Hz	flatness \geq 200 Hz	< 1 %
	-3 dB roll-off	50 Hz (nom.)
	slope	12 dB/octave
300 Hz	flatness \geq 1 kHz	< 1 %
	-3 dB roll-off	300 Hz (nom.)
	slope	12 dB/octave
Weighting filters		
Deemphasis	1-pole lowpass	25/50/75/750 μ s (nom.)
CCIR (unweighted)	23 kHz (5th order), combined with 20 Hz highpass filter	corresponds to ITU-R 468-4 (unweighted)
CCITT (weighted)	CCITT P53 filter	corresponds to ITU-T Rec. O.41

Spectrum analyzer

Frequency

Frequency range	R&S®FSMR3: R&S®FSMR26: R&S®FSMR43: R&S®FSMR50:	DC-coupled AC-coupled DC-coupled AC-coupled DC-coupled DC-coupled	20 Hz to 3.6 GHz 1 MHz to 3.6 GHz 20 Hz to 26.5 GHz 10 MHz to 26.5 GHz 20 Hz to 43 GHz 20 Hz to 50 GHz
Frequency resolution			0.01 Hz
Frequency display			with marker or frequency counter
Marker resolution			1 Hz
Uncertainty			$\pm(\text{marker frequency} \times \text{reference uncertainty} + 10\% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span}/(\text{sweep points} - 1)) + 1 \text{ Hz})$
Marker tuning frequency step size	default marker step size = sweep points		span/624 span/(\text{sweep points} - 1)
Frequency counter resolution	selectable		0.1 Hz to 10 kHz
Count accuracy	S/N > 25 dB		$\pm(\text{frequency} \times \text{reference error} + \frac{1}{2}(\text{last digit}))$
Display range for frequency axis			0 Hz, 10 Hz to max. frequency
Resolution			0.1 Hz
Max. span deviation			1 %
Spectral purity, SSB phase noise (1 Hz)	f = 640 MHz		
Residual FM	10 kHz RBW, RMS		< 1 Hz (nom.)
Carrier offset	10 Hz 10 Hz with R&S®FSU-B4 option 100 Hz 1 kHz 10 kHz 100 kHz 1 MHz 10 MHz		< -73 dBc (nom.) < -86 dBc (nom.) < -98 dBc, typ. -104 dBc < -116 dBc, typ. -124 dBc < -128 dBc, typ. -133 dBc < -128 dBc, typ. -133 dBc < -140 dBc, typ. -146 dBc typ. -160 dBc

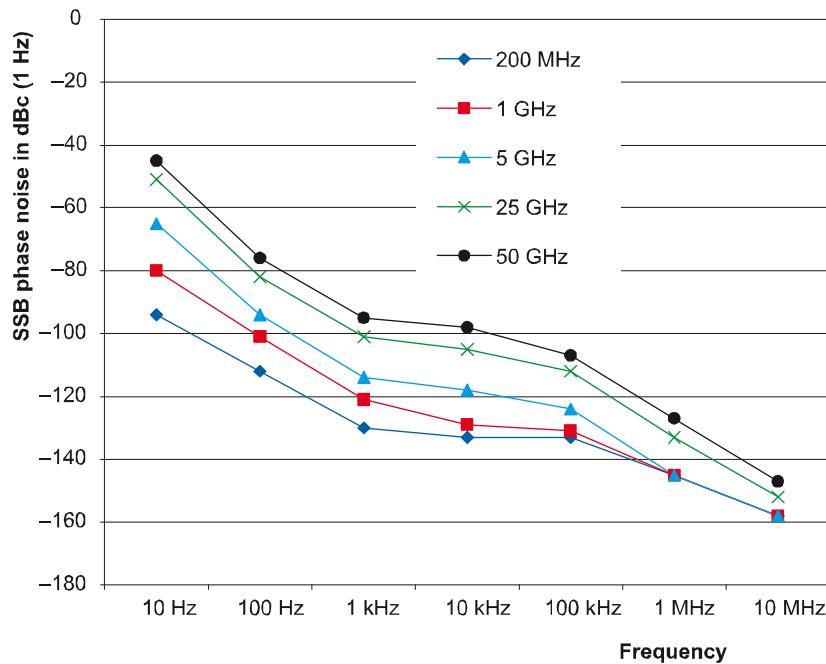

R&S®FSMR center frequency.

Sweep

Sweep time	time sweep, span = 0 Hz frequency sweep, span = 10 Hz	1 µs to 16000 s in 5 % steps 2.5 ms to 16000 s in steps ≤ 10 %
Max. deviation of sweep time		3 %
Measurement in time domain		with marker and cursor lines (31.25 ns resolution)

Resolution bandwidths

Sweep filters		
3 dB bandwidths	R&S®FSMR3, R&S®FSMR26, R&S®FSMR50 R&S®FSMR43	10 Hz to 20 MHz in 1/2/3/5 sequence, 50 MHz 10 Hz to 10 MHz in 1/2/3/5 sequence
Bandwidth uncertainty	10 Hz to 100 kHz (digital) 200 kHz to 5 MHz (analog) 10 MHz 20 MHz 50 MHz, f ≤ 3.6 GHz 50 MHz, f > 3.6 GHz	< 3 % < 10 % –30 % to +10 % –20 % to +20 % –20 % to +20 % –30 % to +100 %
Shape factor 60 dB:3 dB	≤ 100 kHz 200 kHz to 2 MHz 3 MHz to 10 MHz 20 MHz, 50 MHz	< 6 < 12 < 7 < 6 (nom.)
FFT filters		
3 dB bandwidths		1 Hz to 30 kHz in 1/2/3/5 sequence
Bandwidth uncertainty		< 5 % (nom.)
Shape factor 60 dB:3 dB		< 3 (nom.)
EMI filters		
6 dB bandwidths		200 Hz, 9 kHz, 120 kHz
Bandwidth uncertainty		< 3 % (nom.)
Shape factor 60 dB:3 dB		< 6 (nom.)
Channel filters		
Bandwidths		100/200/300/500 Hz, 1/1.5/2/2.4/2.7/3/3.4/4/4.5/5/6/8.5/9/10/ 12.5/14/15/16/18 (RRC)/20/21/24.3 (RRC)/ 25/30/50/100/150/192/200/300/500 kHz, 1/1.2288/1.28 (RRC)/1.5/2/3/3.84 (RRC)/ 4.096 (RRC)/5 MHz
Shape factor 60 dB:3 dB		< 2 (nom.)
Bandwidth uncertainty		2 % (nom.)
Video bandwidths		
		1 Hz to 10 MHz in 1/2/3/5 sequence

Level

Display range	displayed noise floor to +30 dBm	
Intermodulation		
1 dB compression of input mixer	0 dB RF attenuation	
	≤ 3.6 GHz	+13 dBm (nom.)
	> 3.6 GHz	+7 dBm (nom.)
Third-order intercept point (TOI)	level 2 × -10 dBm, Δf > 5 × RBW or 10 kHz, whichever is larger	
R&S®FSMR3		
	10 MHz ≤ f _{in} < 300 MHz	> 17 dBm, typ. 20 dBm
	300 MHz ≤ f _{in} ≤ 3.6 GHz	> 19 dBm, typ. 25 dBm
R&S®FSMR26		
	10 MHz ≤ f _{in} < 300 MHz	> 17 dBm, typ. 20 dBm
	300 MHz ≤ f _{in} < 3.6 GHz	> 22 dBm, typ. 27 dBm
	3.6 GHz ≤ f _{in} < 4 GHz	> 6 dBm, typ. 9 dBm
	4 GHz ≤ f _{in} ≤ 26.5 GHz	> 8 dBm, typ. 11 dBm
R&S®FSMR43		
	10 MHz ≤ f _{in} < 300 MHz	> 17 dBm, typ. 20 dBm
	300 MHz ≤ f _{in} < 3.6 GHz	> 20 dBm, typ. 25 dBm
	3.6 GHz ≤ f _{in} < 4 GHz	> 6 dBm, typ. 9 dBm
	4 GHz ≤ f _{in} < 26.5 GHz	> 8 dBm, typ. 11 dBm
	26.5 GHz ≤ f _{in} < 28 GHz	> 4 dBm, typ. 7 dBm
	28 GHz ≤ f _{in} < 40 GHz	> 8 dBm, typ. 11 dBm
	40 GHz ≤ f _{in} ≤ 43 GHz	8 dBm (nom.)
R&S®FSMR50		
	10 MHz ≤ f _{in} < 300 MHz	> 17 dBm, typ. 20 dBm
	300 MHz ≤ f _{in} < 3.6 GHz	> 20 dBm, typ. 25 dBm
	3.6 GHz ≤ f _{in} < 4 GHz	> 6 dBm, typ. 9 dBm
	4 GHz ≤ f _{in} < 26.5 GHz	> 8 dBm, typ. 11 dBm
	26.5 GHz ≤ f _{in} < 28 GHz	> 4 dBm, typ. 7 dBm
	28 GHz ≤ f _{in} < 40 GHz	> 8 dBm, typ. 11 dBm
	40 GHz ≤ f _{in} ≤ 50 GHz	8 dBm (nom.)
Second harmonic intercept (SHI)	f _{in} < 100 MHz	> 35 dBm
	100 MHz < f _{in} ≤ 400 MHz	> 45 dBm, typ. 55 dBm
	400 MHz < f _{in} ≤ 500 MHz	> 52 dBm, typ. 60 dBm
	500 MHz < f _{in} ≤ 1 GHz	> 45 dBm, typ. 55 dBm
	1 GHz < f _{in} ≤ 1.8 GHz	> 35 dBm
	f _{in} > 1.8 GHz	20 dBm (nom.)
Displayed average noise level		
0 dB RF attenuation, 50 Ω termination, log. scaling, normalized to 1 Hz RBW f < 10 kHz: 10 Hz FFT filter, trace average, sweep count = 20 f ≥ 10 kHz: RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker		
R&S®FSMR3		
	20 Hz	< -90 dBm
	100 Hz	< -110 dBm
	1 kHz	< -120 dBm
	10 kHz	< -130 dBm
	100 kHz	< -130 dBm
	1 MHz	< -140 dBm
	10 MHz	< -153 dBm
R&S®FSMR26		
	20 MHz ≤ f < 2 GHz	< -155 dBm, typ. -158 dBm
	2 GHz ≤ f < 3 GHz	< -153 dBm, typ. -157 dBm
	3 GHz ≤ f ≤ 3.6 GHz	< -152 dBm, typ. -157 dBm
R&S®FSMR43		
	20 MHz ≤ f < 2 GHz	< -152 dBm, typ. -156 dBm
	2 GHz ≤ f < 3.6 GHz	< -150 dBm, typ. -153 dBm
	3.6 GHz ≤ f < 8 GHz	< -152 dBm, typ. -155 dBm
	8 GHz ≤ f < 13 GHz	< -151 dBm, typ. -154 dBm
	13 GHz ≤ f < 18 GHz	< -150 dBm, typ. -153 dBm
	18 GHz ≤ f < 22 GHz	< -149 dBm, typ. -152 dBm
	22 GHz ≤ f < 26.5 GHz	< -148 dBm, typ. -151 dBm

R&S®FSMR43		
20 MHz ≤ f < 2 GHz	< -152 dBm, typ. -156 dBm	
2 GHz ≤ f < 3.6 GHz	< -150 dBm, typ. -153 dBm	
3.6 GHz ≤ f < 8 GHz	< -152 dBm, typ. -155 dBm	
8 GHz ≤ f < 13 GHz	< -151 dBm, typ. -154 dBm	
13 GHz ≤ f < 18 GHz	< -150 dBm, typ. -153 dBm	
18 GHz ≤ f < 22 GHz	< -149 dBm, typ. -152 dBm	
22 GHz ≤ f < 26.5 GHz	< -148 dBm, typ. -151 dBm	
26.5 GHz ≤ f < 32 GHz	< -141 dBm, typ. -144 dBm	
32 GHz ≤ f ≤ 43 GHz	< -136 dBm, typ. -140 dBm	
R&S®FSMR50		
20 MHz ≤ f < 2 GHz	< -152 dBm, typ. -156 dBm	
2 GHz ≤ f < 3.6 GHz	< -150 dBm, typ. -153 dBm	
3.6 GHz ≤ f < 8 GHz	< -152 dBm, typ. -155 dBm	
8 GHz ≤ f < 13 GHz	< -151 dBm, typ. -154 dBm	
13 GHz ≤ f < 18 GHz	< -150 dBm, typ. -153 dBm	
18 GHz ≤ f < 22 GHz	< -149 dBm, typ. -152 dBm	
22 GHz ≤ f < 26.5 GHz	< -148 dBm, typ. -151 dBm	
26.5 GHz ≤ f < 32 GHz	< -141 dBm, typ. -144 dBm	
32 GHz ≤ f < 46 GHz	< -136 dBm, typ. -140 dBm	
46 GHz ≤ f ≤ 50 GHz	< -130 dBm, typ. -133 dBm	

Immunity to interference		
Image frequency	f ≤ 3.6 GHz, f = receive frequency	> 90 dB, typ. > 110 dB
Intermediate frequency	f ≤ 3.6 GHz, f = receive frequency	> 90 dB, typ. > 110 dB
Spurious response	f > 1 MHz, without input signal, 0 dB RF attenuation	< -103 dBm
Other interfering signals	Δf > 100 kHz mixer level < -10 dBm f _{in} ≤ 2.3 GHz	< -80 dBc
	mixer level < -35 dBm 2.3 GHz < f _{in} < 4 GHz	< -70 dBc
	mixer level < -10 dBm 4 GHz ≤ f < 8 GHz	< -70 dBc
	8 GHz ≤ f < 16 GHz	< -64 dBc
	16 GHz ≤ f < 26.5 GHz	< -58 dBc
	26.5 GHz ≤ f < 40 GHz	< -52 dBc
	40 GHz ≤ f ≤ 50 GHz	< -52 dBc (nom.)
	f = receive frequency	

Level display		
Screen		625 × 500 pixel (one diagram), max. 2 diagrams with independent settings
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces	one measurement diagram	3
	two measurement diagrams	6
Trace detector		Max Peak, Min Peak, Auto Peak (normal), Sample, RMS, Average, Quasi Peak
Number of measurement points	default value	625
	range	155 to 30001 in steps of about a factor of 2
Trace functions		ClearWrite, Max Hold, Min Hold, Average
Trace update rate	local measurement, display update rate, 625 points, zero span remote measurement, display OFF	80 per second
	zero span, sweep time = 1 ms	70 per second
	span = 10 MHz, sweep time = 2.5 ms	50 per second
Setting range of reference level	logarithmic level display	-130 dBm to (+5 dBm + RF attenuation), max. 30 dBm, in steps of 0.1 dB
	linear level display	7.0 nV to 7.07 V in steps of 1 %
Units of level axis	logarithmic level display	dBm, dB μ V, dBmV, dB μ A, dBpW
	linear level display	μV, mV, μA, mA, pW, nW

Level measurement uncertainty		
Absolute level uncertainty at 128 MHz	RBW = 10 kHz, level = -30 dBm, reference level = -30 dBm, RF attenuation = 10 dB	< 0.2 dB ($\sigma = 0.07$ dB)
Frequency response referenced to 128 MHz	DC coupling, RF attenuation ≥ 10 dB +20 °C to +30 °C 20 Hz $\leq f < 10$ MHz 10 MHz $\leq f < 3.6$ GHz 3.6 GHz $\leq f < 8$ GHz 8 GHz $\leq f < 22$ GHz 22 GHz $\leq f < 40$ GHz 40 GHz $\leq f < 50$ GHz RF attenuation > 40 dB 3.6 GHz $\leq f < 40$ GHz 40 GHz $\leq f < 50$ GHz +5 °C to +45 °C 20 Hz $\leq f < 3.6$ GHz 3.6 GHz $\leq f < 8$ GHz 8 GHz $\leq f < 22$ GHz 22 GHz $\leq f < 40$ GHz 40 GHz $\leq f < 50$ GHz RF attenuation > 40 dB 3.6 GHz $\leq f < 40$ GHz 40 GHz $\leq f < 50$ GHz	< 0.5 dB ($\sigma = 0.2$ dB) < 0.3 dB ($\sigma = 0.1$ dB) < 1 dB ($\sigma = 0.3$ dB) < 1.5 dB ($\sigma = 0.5$ dB) < 2 dB ($\sigma = 0.7$ dB) < 2.5 dB ($\sigma = 0.8$ dB) add 0.5 dB to above values add 1 dB to above values < 0.6 dB ($\sigma = 0.2$ dB) < 1.5 dB ($\sigma = 0.3$ dB) < 2 dB ($\sigma = 0.5$ dB) < 2.5 dB ($\sigma = 0.7$ dB) < 3 dB ($\sigma = 0.8$ dB) add 0.5 dB to above values add 1.5 dB to above values < 0.2 dB ($\sigma = 0.07$ dB)
Attenuator switching uncertainty	f = 128 MHz 0 dB to 70 dB, referenced to 10 dB attenuation	< 0.15 dB ($\sigma = 0.05$ dB)
Uncertainty of reference level setting	RF attenuation = 10 dB, referenced to -10 dBm reference level setting	< 0.15 dB ($\sigma = 0.05$ dB)
Display nonlinearity	+20 °C to +30 °C, mixer level ≤ -10 dBm	
Logarithmic level display	RBW ≤ 100 kHz or channel filters, S/N > 20 dB 0 dB to -70 dB -70 dB to -90 dB 200 kHz \leq RBW ≤ 10 MHz, S/N > 16 dB 0 dB to -50 dB -50 dB to -70 dB RBW > 10 MHz, S/N > 16 dB 0 dB to -50 dB	< 0.1 dB ($\sigma = 0.03$ dB) < 0.3 dB ($\sigma = 0.1$ dB) < 0.2 dB ($\sigma = 0.07$ dB) < 0.5 dB ($\sigma = 0.17$ dB) < 0.5 dB ($\sigma = 0.17$ dB)
Linear level display		5 % of reference level
Bandwidth switching error	referenced to 10 kHz RBW 1 Hz to 100 kHz 200 kHz to 3 MHz 5 MHz to 50 MHz FFT filter: 1 Hz to 3 kHz	< 0.1 dB ($\sigma = 0.03$ dB) < 0.2 dB ($\sigma = 0.07$ dB) < 0.5 dB ($\sigma = 0.15$ dB) < 0.2 dB ($\sigma = 0.07$ dB)
Total measurement uncertainty	signal level: 0 dB to -70 dB below reference level, S/N > 20 dB, 10 dB \leq RF attenuation ≤ 40 dB, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C, mixer level ≤ -10 dBm 20 Hz $\leq f < 10$ MHz, RBW ≤ 100 kHz 20 Hz $\leq f < 10$ MHz, RBW > 100 kHz 10 MHz $\leq f < 3.6$ GHz, RBW ≤ 100 kHz 10 MHz $\leq f < 3.6$ GHz, RBW > 100 kHz 3.6 GHz $\leq f < 8$ GHz 8 GHz $\leq f < 22$ GHz 22 GHz $\leq f < 40$ GHz 40 GHz $\leq f < 50$ GHz	0.4 dB 0.5 dB 0.3 dB 0.5 dB 0.9 dB 1.2 dB 1.5 dB 1.8 dB

I/Q data

Base instrument		
Interface		GPIB or LAN
Memory length		max. 512 ksample each for I and Q
Sample length		24 bit each for I and Q
Sample rate	settable in 0.5 Hz steps (32 MHz $\times 2^{-n}$, n = 0 to 11)	15.625 kHz to 32 MHz
Max. signal bandwidth	sample rate \leq 2 MHz 4 MHz 8 MHz 16 MHz 32 MHz	0.8 \times sample rate 2.8 MHz 4.8 MHz 7 MHz 9 MHz
IF prefilter bandwidth		300 kHz to 10 MHz, 1/2/3/5 steps

With R&S®FSMR-B73 option		
Interface		GPIB or LAN
Sample rate	programmable in 0.1 Hz steps	10 kHz to 81.6 MHz
ADC resolution		14 bit
I/Q memory		16 Msample each for I and Q data
Max. information bandwidth	R&S®FSMR3, R&S®FSMR26, R&S®FSMR50 R&S®FSMR43	28 MHz 7 MHz
Spurious	full-scale input signal	typ. < -70 dBc
Third-order distortion	two tones, -6 dBfs each	typ. < -80 dBc
LO feedthrough	$f_{I/Q} = 81.6 \text{ MHz} - f_{\text{center}}$ mixer level = -10 dBm	typ. < -65 dBfs
Aliased DC offset	$f_{I/Q} = 20.4 \text{ MHz}$; within $\pm 10 \text{ K}$ temperature change after I/Q or total calibration	typ. < -65 dBfs
Equalized bandwidth	RBW setting 3 MHz 5 MHz 10 MHz 20 MHz, not available with the R&S®FSMR43 50 MHz, not available with the R&S®FSMR43	equalized bandwidth 2 MHz 3 MHz 7 MHz 17 MHz 28 MHz
Amplitude flatness	within equalized bandwidth $f \leq 3.6 \text{ GHz}$ $f > 3.6 \text{ GHz}$, YIG filter OFF	typ. 0.3 dB typ. 0.5 dB
Deviation from linear phase	within equalized bandwidth $f \leq 3.6 \text{ GHz}$ $f > 3.6 \text{ GHz}$, YIG filter OFF	typ. 1° typ. 2°

Audio demodulation

AF demodulation types		AM and FM
Audio output		loudspeaker and phone jack
Marker stop time in spectrum mode		100 ms to 60 s

General

Trigger functions

Trigger		
Trigger source	free run, video, external, IF level (mixer level: +10 dBm to –50 dBm)	
Trigger offset	span \geq 10 Hz	125 ns to 100 s, resolution = min. 125 ns (or 1 % of offset)
	span = 0 Hz	\pm (125 ns to 100 s), resolution = min. 125 ns, depends on sweep time
Max. deviation of trigger offset	\pm (31.25 ns + (0.1 % \times trigger offset))	
Gated sweep		
Gate source	external, IF level, video	
Gate delay	1 μ s to 100 s	
Gate length	125 ns to 100 s, resolution = min. 125 ns (or 1 % of gate length)	
Max. deviation of gate length	\pm (31.25 ns + (0.05 % \times gate length))	

Inputs and outputs (front panel)

RF input		
Maximum input level		
DC voltage	RF input, AC-coupled	50 V
	RF input, DC-coupled	0 V
CW RF power	RF attenuation = 0 dB	20 dBm (= 0.1 W)
	RF attenuation \geq 10 dB	30 dBm (= 1 W)
Pulse spectral density		97 dB μ V/MHz
Max. pulse voltage	RF attenuation \geq 10 dB	150 V
Max. pulse energy	RF attenuation \geq 10 dB, 10 μ s	1 mWs
Impedance		
Connector	R&S®FSMR3	N female
	R&S®FSMR26	test port adapter, APC 3.5 mm/N female
	R&S®FSMR43	test port adapter, 2.92 mm (K)/N female
	R&S®FSMR50	test port adapter, 2.4 mm/2.92 mm (K)/N female
VSWR		
measuring receiver, RF level autorange, DC-coupled, 10 dB min. attenuation ON		
f < 2.5 GHz		< 1.2, typ. 1.1
2.5 GHz \leq f \leq 3.6 GHz		< 1.3, typ. 1.2
R&S®FSMR26, R&S®FSMR43, R&S®FSMR50		
3.6 GHz < f < 5 GHz		< 1.3, typ. 1.2
5 GHz \leq f < 11 GHz		< 1.5, typ. 1.3
11 GHz \leq f < 18 GHz		< 1.6, typ. 1.4
18 GHz \leq f < 21 GHz		< 1.7, typ. 1.5
21 GHz \leq f < 24 GHz		< 1.8, typ. 1.6
24 GHz \leq f \leq 26.5 GHz		< 1.9, typ. 1.7
R&S®FSMR43, R&S®FSMR50		
26.5 GHz \leq f < 36 GHz		< 2.0, typ. 1.8
36 GHz \leq f < 40 GHz		< 2.3, typ. 2.0
40 GHz \leq f \leq 50 GHz		< 3.0 nom., typ. < 2.5
RF attenuation = 0 dB, DC-coupled		
f < 3 GHz		< 1.8
f \leq 3.6 GHz		< 2
R&S®FSMR26, R&S®FSMR43, R&S®FSMR50		
3.6 GHz < f \leq 26.5 GHz		< 2.5
R&S®FSMR43, R&S®FSMR50		
26 GHz < f \leq 40 GHz		< 3
RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, 50 dB, DC-coupled		
f = 30 MHz		< 1.06

	manual RF attenuation \geq 10 dB, DC-coupled	
	$f \leq 3.6 \text{ GHz}$	< 1.5
	R&S®FSMR26, R&S®FSMR43, R&S®FSMR50	
	$3.6 \text{ GHz} < f < 18 \text{ GHz}$	< 1.8
	$18 \text{ GHz} \leq f \leq 26.5 \text{ GHz}$	< 2.0
	R&S®FSMR43, R&S®FSMR50	
	$26.5 \text{ GHz} < f < 40 \text{ GHz}$	< 2.5
	$40 \text{ GHz} \leq f \leq 50 \text{ GHz}$	< 3 (nom.)
	RF attenuation $< 10 \text{ dB}$ or AC coupling	typ. 1.5
Setting range of attenuator	0 dB to 75 dB, in 5 dB steps	
Power reference		
Frequency	50 MHz	
Connector	N female	
Impedance	50 Ω	
Level	1 mW	
Max. deviation	< 1.2 %	
Audio input		
Input impedance	selectable	50 Ω /1 M Ω (nom.)
Maximum ratings	50 Ω input impedance, max. power	< 1 W
	1 M Ω input impedance, max. peak voltage	< 20 V
Probe power supply		
Supply voltages	+15 V DC, -12.6 V DC and ground, max. 150 mA (nom.)	
Power supply for antennas, etc.		
Supply voltages	±10 V and ground, max. 100 mA (nom.)	
USB interface	type A plug, version 2.0	
AF output		
Connector	3.5 mm mini jack	
Output impedance	10 Ω	
Open-circuit voltage	up to 1.5 V, adjustable	
Power supply for noise source		
Output voltage	0 V and 28 V, switchable, nominal	

Inputs and outputs (rear panel)

IF 20.4 MHz		BNC female
Impedance		50 Ω
Bandwidth	RBW ≤ 30 kHz RBW = 50 kHz, 100 kHz 200 kHz ≤ RBW ≤ 10 MHz	1.67 × resolution bandwidth, min. 2.6 kHz 400 kHz equal to resolution bandwidth
Level	RBW ≤ 100 kHz, FFT filter, mixer level > -70 dBm RBW = 200 kHz to 10 MHz, mixer level > -50 dBm	-20 dBm at reference level 0 dBm at reference level

IF 404.4 MHz	not available with the R&S®FSMR43, active only if RBW > 10 MHz	BNC female
Impedance		50 Ω
Bandwidth	RBW > 10 MHz	equal to resolution bandwidth
Level	mixer level ≤ 0 dBm	typ. 10 dB below mixer level

Video output		BNC female
Impedance		50 Ω
Output voltage	RBW ≥ 200 kHz, logarithmic scaling, full scale	0 V to 1 V (EMF)

Reference output		BNC female
Impedance		50 Ω
Output frequency	internal reference external reference	10 MHz same as reference input signal
Level		> 0 dBm (nom.)

Reference input		BNC female
Impedance		50 Ω
Input frequency range		1 MHz ≤ f _{in} ≤ 20 MHz, in 1 Hz steps
Required level		> 0 dBm from 50 Ω

Sweep output		BNC female
Output voltage		0 V to 5 V, proportional to displayed frequency

External trigger/gate input		BNC female
Trigger voltage		0.5 V to 3.5 V
Input impedance		≥ 10 kΩ

IEC/IEEE bus control		interface in line with IEC 625-2 (IEEE 488.2)
Command set		SCPI 1997.0 or HP8566 compatible
Connector		24-pin Amphenol female
Interface functions		SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0

LAN interface		10/100BaseT, RJ-45
USB interface	upper connector	type A plug, version 1.1
	lower connector	type A plug, version 2.0
Serial interface		RS-232-C (COM), 9-pin female connectors
Printer interface		parallel (Centronics-compatible)
Mouse interface		PS/2-compatible
Connector for external monitor (VGA)		15-pin D-Sub

General data

Display	21 cm LC TFT color display (8.4")
Resolution	800 × 600 pixel (SVGA resolution)
Pixel failure rate	< 1 × 10 ⁻⁵

Mass memory	
Mass memory	hard disk, USB flash disk (not supplied)
Data storage	> 500 instrument settings and traces

Temperature	
Temperature	operating temperature range permissible temperature range storage temperature range
	+5 °C to +40 °C 0 °C to +50 °C –40 °C to +70 °C
Climatic loading	+40 °C at 95 % relative humidity in line with EN 60068-2-30

Mechanical resistance	
Vibration	sinusoidal random
	5 Hz to 150 Hz, max. 2 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz; in line with EN 60068-2-6
Shock	10 Hz to 100 Hz, acceleration 1 g (RMS)
	40 g shock spectrum, in line with MIL-STD-810E, method 516.4, procedure I, and MIL-PRF-28800F
Recommended calibration interval	operation with internal reference
RFI suppression	1 year in line with EMC Directive 2004/108/EC including: IEC/EN 61326-1, IEC/EN 61326-2-1, CISPR 11/EN 55011, IEC/EN 61000-3-2, IEC/EN 61000-3-3

Power supply	
AC supply	100 V to 240 V, 3.1 A to 1.3 A; 50 Hz to 400 Hz, class of protection I in line with VDE 411
Power consumption	R&S®FSMR3 typ. 130 VA
	R&S®FSMR26, R&S®FSMR50 typ. 150 VA
Safety	in line with EN 61010-1, IEC 61010-1, UL 61010-1, CAN/CSA-C22.2 No. 61010-1-4
Test mark	VDE, GS, CSA, CSA-NRTL
Dimensions	W × H × D 435 mm × 192 mm × 460 mm (17.13 in × 7.56 in × 18.11 in)
Weight, without options, nominal	R&S®FSMR3 14.6 kg (32.19 lb) R&S®FSMR26 16.5 kg (36.38 lb) R&S®FSMR43, R&S®FSMR50 16.8 kg (37.04 lb)

Options

**R&S®FSMR-B2 YIG preselection (for the R&S®FSMR26/43/50),
R&S®FSMR-B223 YIG preselection with 20 dB preamplifier
(for the R&S®FSMR26 only, requires the R&S®FSU-B25 option)**

Intermodulation		
Third-order intercept point (TOI)	YIG filter OFF, preamplifier OFF	
R&S®FSMR26	3.6 GHz ≤ f_{in} ≤ 26.5 GHz	> 8 dBm, typ. 11 dBm
R&S®FSMR43, R&S®FSMR50	26.5 GHz < f_{in} ≤ 50 GHz	> 8 dBm, typ. 11 dBm
YIG filter ON, preamplifier OFF		
R&S®FSMR26	3.6 GHz ≤ f_{in} ≤ 26.5 GHz	> 12 dBm, typ. 15 dBm
R&S®FSMR43, R&S®FSMR50	26.5 GHz < f_{in} ≤ 50 GHz	> 12 dBm, typ. 15 dBm
Second harmonic intercept (SHI)	R&S®FSMR26, R&S®FSMR43, R&S®FSMR50	
YIG filter OFF, preamplifier OFF	$f_{in} > 1.8$ GHz	25 dBm (nom.)
YIG filter ON, preamplifier OFF	$f_{in} > 1.8$ GHz	80 dBm (nom.)
Displayed average noise level with R&S®FSMR-B2 (spectrum analyzer mode)	0 dB RF attenuation, 50 Ω termination, log. scaling, normalized to 1 Hz RBW RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker	
YIG filter OFF		
R&S®FSMR26	3.6 GHz ≤ $f <$ 8 GHz	< -151 dBm, typ. -154 dBm
	8 GHz ≤ $f <$ 13 GHz	< -150 dBm, typ. -153 dBm
	13 GHz ≤ $f <$ 18 GHz	< -149 dBm, typ. -152 dBm
	18 GHz ≤ $f <$ 22 GHz	< -147 dBm, typ. -151 dBm
	22 GHz ≤ $f \leq$ 26.5 GHz	< -145 dBm, typ. -150 dBm
R&S®FSMR43	3.6 GHz ≤ $f <$ 8 GHz	< -151 dBm, typ. -154 dBm
	8 GHz ≤ $f <$ 13 GHz	< -150 dBm, typ. -153 dBm
	13 GHz ≤ $f <$ 18 GHz	< -149 dBm, typ. -152 dBm
	18 GHz ≤ $f <$ 22 GHz	< -148 dBm, typ. -151 dBm
	22 GHz ≤ $f <$ 26.5 GHz	< -147 dBm, typ. -150 dBm
	26.5 GHz ≤ $f <$ 32 GHz	< -141 dBm, typ. -144 dBm
	32 GHz ≤ $f <$ 40 GHz	< -136 dBm, typ. -140 dBm
	40 GHz ≤ $f <$ 43 GHz	< -133 dBm, typ. -136 dBm
R&S®FSMR50	3.6 GHz ≤ $f <$ 8 GHz	< -151 dBm, typ. -154 dBm
	8 GHz ≤ $f <$ 13 GHz	< -150 dBm, typ. -153 dBm
	13 GHz ≤ $f <$ 18 GHz	< -149 dBm, typ. -152 dBm
	18 GHz ≤ $f <$ 22 GHz	< -148 dBm, typ. -151 dBm
	22 GHz ≤ $f <$ 26.5 GHz	< -147 dBm, typ. -150 dBm
	26.5 GHz ≤ $f <$ 32 GHz	< -141 dBm, typ. -144 dBm
	32 GHz ≤ $f <$ 40 GHz	< -136 dBm, typ. -140 dBm
	40 GHz ≤ $f <$ 46 GHz	< -133 dBm, typ. -136 dBm
	46 GHz ≤ $f \leq$ 50 GHz	< -130 dBm, typ. -133 dBm
YIG filter ON		
R&S®FSMR26	3.6 GHz ≤ $f <$ 8 GHz	< -151 dBm, typ. -155 dBm
	8 GHz ≤ $f <$ 13 GHz	< -149 dBm, typ. -153 dBm
	13 GHz ≤ $f <$ 18 GHz	< -147 dBm, typ. -151 dBm
	18 GHz ≤ $f <$ 22 GHz	< -145 dBm, typ. -148 dBm
	22 GHz ≤ $f \leq$ 26.5 GHz	< -143 dBm, typ. -146 dBm

	R&S®FSMR43	
	3.6 GHz ≤ f < 13 GHz	< -148 dBm, typ. -151 dBm
	13 GHz ≤ f < 18 GHz	< -146 dBm, typ. -150 dBm
	18 GHz ≤ f < 22 GHz	< -145 dBm, typ. -148 dBm
	22 GHz ≤ f < 26.5 GHz	< -143 dBm, typ. -145 dBm
	26.5 GHz ≤ f < 32 GHz	< -135 dBm, typ. -138 dBm
	32 GHz ≤ f < 40 GHz	< -130 dBm, typ. -133 dBm
	40 GHz ≤ f < 43 GHz	< -128 dBm, typ. -131 dBm
	R&S®FSMR50	
	3.6 GHz ≤ f < 13 GHz	< -148 dBm, typ. -151 dBm
	13 GHz ≤ f < 18 GHz	< -146 dBm, typ. -150 dBm
	18 GHz ≤ f < 22 GHz	< -145 dBm, typ. -148 dBm
	22 GHz ≤ f < 26.5 GHz	< -143 dBm, typ. -145 dBm
	26.5 GHz ≤ f < 32 GHz	< -135 dBm, typ. -138 dBm
	32 GHz ≤ f < 40 GHz	< -130 dBm, typ. -133 dBm
	40 GHz ≤ f < 46 GHz	< -128 dBm, typ. -131 dBm
	46 GHz ≤ f ≤ 50 GHz	< -125 dBm, typ. -128 dBm
Displayed average noise level with R&S®FSMR-B223 (spectrum analyzer mode)	preamplifier OFF	
	3.6 GHz to 8 GHz	R&S®FSMR-B2 specifications + 2 dB
	8 GHz to 26.5 GHz	R&S®FSMR-B2 specifications + 3 dB
	preamplifier ON, YIG filter OFF	
	3.6 GHz to 8 GHz	< -160 dBm, typ. -163 dBm
	8 GHz to 13 GHz	< -157 dBm, typ. -160 dBm
	13 GHz to 18 GHz	< -155 dBm, typ. -158 dBm
	18 GHz to 22 GHz	< -152 dBm, typ. -157 dBm
	22 GHz to 26.5 GHz	< -148 dBm, typ. -153 dBm
	preamplifier ON, YIG filter ON	YIG filter OFF specifications - 2 dB, nominal
Immunity to interference		
Image frequency	YIG filter ON	
	R&S®FSMR26	
	$f_{in} > 3.6 \text{ GHz}$	> 70 dB, typ. > 100 dB
	R&S®FSMR43, R&S®FSMR50	
	3.6 GHz < f_{in} < 12 GHz	> 70 dB, typ. > 80 dB
	12 GHz < f_{in} < 14 GHz	> 65 dB, typ. > 75 dB
	14 GHz < f_{in} < 32 GHz	> 55 dB, typ. > 60 dB
	$f_{in} > 32 \text{ GHz}$	> 70 dB, typ. > 80 dB
Intermediate frequency	YIG filter ON	
	R&S®FSMR26, R&S®FSMR43, R&S®FSMR50	
	3.6 GHz < $f \leq 4.2 \text{ GHz}$	typ. 70 dB
	$f > 4.2 \text{ GHz}$	> 70 dB, typ. > 90 dB

Level measurement uncertainty (spectrum analyzer mode)	YIG filter OFF, DC coupling, RF attenuation ≥ 10 dB	
	+20 °C to +30 °C	
	3.6 GHz $\leq f < 8$ GHz	< 1 dB ($\sigma = 0.3$ dB)
	8 GHz $\leq f < 22$ GHz	< 1.5 dB ($\sigma = 0.5$ dB)
	22 GHz $\leq f < 40$ GHz	< 2 dB ($\sigma = 0.7$ dB)
	40 GHz $\leq f < 50$ GHz	< 2.5 dB ($\sigma = 0.8$ dB)
	RF attenuation > 40 dB	
	3.6 GHz $\leq f < 40$ GHz	add 0.5 dB to above values
	40 GHz $\leq f \leq 50$ GHz	add 1 dB to above values
	+5 °C to +45 °C	
	3.6 GHz $\leq f < 8$ GHz	< 1.5 dB ($\sigma = 0.5$ dB)
	8 GHz $\leq f < 22$ GHz	< 2 dB ($\sigma = 0.7$ dB)
	22 GHz $\leq f < 40$ GHz	< 2.5 dB ($\sigma = 0.8$ dB)
	40 GHz $\leq f < 50$ GHz	< 3 dB ($\sigma = 1.0$ dB)
	RF attenuation > 40 dB	
	3.6 GHz $\leq f < 40$ GHz	add 0.5 dB to above values
	40 GHz $\leq f \leq 50$ GHz	add 1.5 dB to above values
	YIG filter ON, DC coupling, RF attenuation ≥ 10 dB	
	+20 °C to +30 °C	
	3.6 GHz $\leq f < 8$ GHz, span < 1 GHz	< 1.5 dB ($\sigma = 0.5$ dB)
	8 GHz $\leq f < 22$ GHz, span < 1 GHz	< 2 dB ($\sigma = 0.7$ dB)
	22 GHz $\leq f < 40$ GHz, span < 1 GHz	< 2.5 dB ($\sigma = 0.8$ dB)
	40 GHz $\leq f < 50$ GHz, span < 1 GHz	< 3 dB ($\sigma = 1.0$ dB)
	RF attenuation > 40 dB or span ≥ 1 GHz	
	3.6 GHz $\leq f < 40$ GHz	add 0.5 dB to above values
	40 GHz $\leq f \leq 50$ GHz	add 1 dB to above values
	+5 °C to +45 °C	
	3.6 GHz $\leq f < 8$ GHz, span < 1 GHz	< 2 dB ($\sigma = 0.7$ dB)
	8 GHz $\leq f < 22$ GHz, span < 1 GHz	< 2.5 dB ($\sigma = 0.8$ dB)
	22 GHz $\leq f < 40$ GHz, span < 1 GHz	< 3 dB ($\sigma = 1.0$ dB)
	40 GHz $\leq f < 50$ GHz, span < 1 GHz	< 3.5 dB ($\sigma = 1.2$ dB)
	RF attenuation > 40 dB or span ≥ 1 GHz	
	3.6 GHz $\leq f < 40$ GHz	add 0.5 dB to above values
	40 GHz $\leq f \leq 50$ GHz	add 1.5 dB to above values

R&S®FSU-B9 tracking generator, R&S®FSU-B12 step attenuator for tracking generator

Unless specified otherwise, specifications do not apply to a frequency range from $-3 \times \text{RBW}$ to $+3 \times \text{RBW}$, however at least not from -100 kHz to $+100 \text{ kHz}$. Maximum output level: $+5 \text{ dBm}$ (peak modulation in the case of amplitude-modulated signals).

Frequency		
Frequency range		100 kHz to 3.6 GHz
Resolution		1 Hz
Frequency offset		
Setting range		$\pm 200 \text{ MHz}$
Resolution		1 Hz
Spectral purity		
SSB phase noise	f = 500 MHz, 10 kHz carrier offset	
	normal mode	typ. -120 dBc (1 Hz)
	with frequency offset	typ. -110 dBc (1 Hz)
	with FM modulation ON	typ. -110 dBc (1 Hz)
Level		
Level setting range		-30 dBm to $+5 \text{ dBm}$ in steps of 0.1 dB
	with R&S®FSU-B12 option	-100 dBm to $+5 \text{ dBm}$ in steps of 0.1 dB
Max. deviation of output level		
Absolute	f = 128 MHz, output level = -20 dBm to 0 dBm	< 1 dB ($\sigma = 0.34 \text{ dB}$)
Frequency response	referenced to level at 128 MHz, sweep time $> 100 \text{ ms}$, $+5 \text{ }^\circ\text{C}$ to $+45 \text{ }^\circ\text{C}$	
	output level = -20 dBm to 0 dBm	
	100 kHz to 3.6 GHz	< 3 dB, typ. 1.9 dB
	output level = -30 dBm to -20 dBm	
	f = 100 kHz to 3.6 GHz	3 dB
	additional deviation with R&S®FSU-B12 option	
	100 kHz to 3.6 GHz	< 1 dB
Dynamic range		
Attenuation measurement range	RBW = 1 kHz, f > 10 MHz	100 dB
Harmonics	output level = -10 dBm	typ. -30 dBc
Spurious, nonharmonics	output level = 0 dBm	typ. -30 dBc
Modulation		
Modulation format	external	I/Q, AM, FM
Input voltage	full scale	
	AM, FM, V _{pp}	1 V
	I/Q	$\sqrt{V_i^2 + V_q^2} = 0.5 \text{ V}$
AM		
Modulation depth	f _{center} > f _{mod} , span = 0 Hz	0 % to 99 %
Modulation frequency response	0 Hz to 5 MHz	1 dB
	0 Hz to 30 MHz	3 dB
FM		
Frequency deviation	full range	100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz
Modulation frequency range	deviation $\leq 10 \text{ MHz}$	0 Hz to 1 kHz
	deviation $\leq 1 \text{ MHz}$	0 Hz to 100 kHz
Modulation frequency response	0 Hz to 100 kHz	1 dB
I/Q modulation		
Modulation frequency response	f _{center} > f _{mod} , span = 0 Hz	
	0 Hz to 5 MHz	1 dB
	0 Hz to 30 MHz	3 dB

Modulation deviation of tracking generator	I/Q modulation, typical values, baseband signals generated by the R&S®AMIQ	
EVM	NADC/TETRA/PDC	
	RMS	2 %
	peak	4 %
PHS		
	RMS	2 %
	peak	5 %
Phase error	GSM/DCS1800/PCS1900	
	RMS	1.5°
	peak	5°
Rho factor	IS-95 CDMA	0.997
Inputs and outputs (front panel)		
RF output	N female, 50 Ω	
VSWR	100 kHz ≤ f ≤ 2 GHz	1.2
	2 GHz ≤ f ≤ 3.6 GHz	1.5
Inputs and outputs (rear panel)		
TG I/AM IN	BNC female	
Impedance	50 Ω	
Input voltage	V_{pp}	1 V
TG Q/FM IN	BNC female	
Impedance	50 Ω	
Input voltage	V_{pp}	1 V

**R&S®FSMR-B23 RF preamplifier
(for the R&S®FSMR26 only, requires the R&S®FSU-B25 option)**

Frequency		
Frequency range	R&S®FSMR26	3.6 GHz to 26.5 GHz
Level measurement uncertainty (spectrum analyzer mode)		
Frequency response	preamplifier ON	
	3.6 GHz to 8 GHz	< 2.0 dB ($\sigma = 0.7$ dB)
	8 GHz to 22 GHz	< 2.5 dB ($\sigma = 0.8$ dB)
Displayed average noise level (spectrum analyzer mode)	22 GHz to 26.5 GHz	< 3.0 dB ($\sigma = 1$ dB)
	0 dB RF attenuation, 50 Ω termination, log. scaling, normalized to 1 Hz RBW RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker	
	preamplifier OFF	
	3.6 GHz to 8 GHz	R&S®FSMR26 specifications + 2 dB
	8 GHz to 26.5 GHz	R&S®FSMR26 specifications + 3 dB
	preamplifier ON	
	3.6 GHz to 8 GHz	< -160 dBm, typ. -163 dBm
	8 GHz to 13 GHz	< -157 dBm, typ. -160 dBm
	13 GHz to 18 GHz	< -155 dBm, typ. -158 dBm
	18 GHz to 22 GHz	< -152 dBm, typ. -157 dBm
	22 GHz to 26.5 GHz	< -148 dBm, typ. -153 dBm

R&S®FSU-B24 30 dB RF preamplifier (for the R&S®FSMR26/43/50)

Frequency		
Frequency range	R&S®FSMR26	100 kHz to 26.5 GHz
	R&S®FSMR43	100 kHz to 43 GHz
	R&S®FSMR50	100 kHz to 50 GHz
Nominal gain		
Intermodulation (spectrum analyzer mode)		
Second harmonic intercept (SHI)	with R&S®FSMR-B2 option, preamplifier OFF	
	YIG filter OFF, $f_{in} > 1.8$ GHz	25 dBm (nom.)
	YIG filter ON, 1.8 GHz $\leq f_{in} \leq 2.4$ GHz	65 dBm (nom.)
	YIG filter ON, $f_{in} > 2.4$ GHz	80 dBm (nom.)
Displayed average noise level	0 dB RF attenuation, 50 Ω termination, log. scaling, normalized to 1 Hz RBW, preamplifier OFF, without R&S®FSMR-B2 option	
	$f < 10$ kHz: 10 Hz FFT filter, trace average, sweep count = 20	
	$f \geq 10$ kHz: RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker	
	20 Hz	< -90 dBm
	100 Hz	< -110 dBm
	1 kHz	< -120 dBm
	10 kHz	< -130 dBm
	100 kHz	< -130 dBm
	1 MHz	< -140 dBm
	10 MHz	< -150 dBm
	R&S®FSMR26	
	20 MHz $\leq f < 2$ GHz	< -151 dBm, typ. -154 dBm
	2 GHz $\leq f < 3.6$ GHz	< -149 dBm, typ. -152 dBm
	3.6 GHz $\leq f < 8$ GHz	< -150 dBm, typ. -153 dBm
	8 GHz $\leq f < 13$ GHz	< -148 dBm, typ. -151 dBm
	13 GHz $\leq f < 18$ GHz	< -147 dBm, typ. -150 dBm
	18 GHz $\leq f < 22$ GHz	< -146 dBm, typ. -149 dBm
	22 GHz $\leq f < 26.5$ GHz	< -145 dBm, typ. -148 dBm
	R&S®FSMR43	
	20 MHz $\leq f < 2$ GHz	< -151 dBm, typ. -154 dBm
	2 GHz $\leq f < 3.6$ GHz	< -149 dBm, typ. -152 dBm
	3.6 GHz $\leq f < 8$ GHz	< -150 dBm, typ. -153 dBm
	8 GHz $\leq f < 18$ GHz	< -147 dBm, typ. -150 dBm
	18 GHz $\leq f < 22$ GHz	< -143 dBm, typ. -146 dBm
	22 GHz $\leq f < 32$ GHz	< -140 dBm, typ. -143 dBm
	32 GHz $\leq f < 40$ GHz	< -137 dBm, typ. -140 dBm
	40 GHz $\leq f < 43$ GHz	< -128 dBm, typ. -131 dBm
	R&S®FSMR50	
	20 MHz $\leq f < 2$ GHz	< -151 dBm, typ. -154 dBm
	2 GHz $\leq f < 3.6$ GHz	< -149 dBm, typ. -152 dBm
	3.6 GHz $\leq f < 8$ GHz	< -150 dBm, typ. -153 dBm
	8 GHz $\leq f < 18$ GHz	< -147 dBm, typ. -150 dBm
	18 GHz $\leq f < 22$ GHz	< -143 dBm, typ. -146 dBm
	22 GHz $\leq f < 32$ GHz	< -140 dBm, typ. -143 dBm
	32 GHz $\leq f < 40$ GHz	< -137 dBm, typ. -140 dBm
	40 GHz $\leq f < 46$ GHz	< -128 dBm, typ. -131 dBm
	46 GHz $\leq f \leq 50$ GHz	< -125 dBm, typ. -128 dBm
0 dB RF attenuation, 50 Ω termination, log. scaling, normalized to 1 Hz RBW, preamplifier ON, without R&S®FSMR-B2 option		
RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker		
100 kHz	< -140 dBm	
1 MHz	< -150 dBm	
10 MHz	< -161 dBm	
20 MHz $\leq f < 2$ GHz	< -163 dBm, typ. -166 dBm	
2 GHz $\leq f < 3.6$ GHz	< -161 dBm, typ. -164 dBm	
3.6 GHz $\leq f < 22$ GHz	< -160 dBm, typ. -163 dBm	
22 GHz $\leq f < 26.5$ GHz	< -157 dBm, typ. -160 dBm	
26.5 GHz $\leq f < 40$ GHz	< -155 dBm, typ. -158 dBm	
40 GHz $\leq f < 46$ GHz	< -147 dBm, typ. -150 dBm	
46 GHz $\leq f \leq 50$ GHz	< -142 dBm, typ. -145 dBm	

	0 dB RF attenuation, 50 Ω termination, log. scaling, normalized to 1 Hz RBW, with R&S®FSMR-B2 option, YIG filter OFF, preamplifier OFF f < 10 kHz: 10 Hz FFT filter, trace average, sweep count = 20 f ≥ 10 kHz: RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker
all models	
20 Hz	< -90 dBm
100 Hz	< -110 dBm
1 kHz	< -120 dBm
10 kHz	< -130 dBm
100 kHz	< -130 dBm
1 MHz	< -140 dBm
10 MHz	< -150 dBm
R&S®FSMR26	
20 MHz ≤ f < 2 GHz	< -151 dBm, typ. -154 dBm
2 GHz ≤ f < 8 GHz	< -149 dBm, typ. -152 dBm
8 GHz ≤ f < 13 GHz	< -146 dBm, typ. -149 dBm
13 GHz ≤ f < 18 GHz	< -144 dBm, typ. -147 dBm
18 GHz ≤ f < 22 GHz	< -142 dBm, typ. -145 dBm
22 GHz ≤ f < 26.5 GHz	< -140 dBm, typ. -143 dBm
R&S®FSMR43	
20 MHz ≤ f < 2 GHz	< -150 dBm, typ. -153 dBm
2 GHz ≤ f < 3.6 GHz	< -147 dBm, typ. -150 dBm
3.6 GHz ≤ f < 13 GHz	< -145 dBm, typ. -148 dBm
13 GHz ≤ f < 18 GHz	< -142 dBm, typ. -145 dBm
18 GHz ≤ f < 25 GHz	< -140 dBm, typ. -143 dBm
25 GHz ≤ f < 32 GHz	< -132 dBm, typ. -135 dBm
32 GHz ≤ f < 40 GHz	< -127 dBm, typ. -130 dBm
40 GHz ≤ f < 43 GHz	< -120 dBm, typ. -123 dBm
R&S®FSMR50	
20 MHz ≤ f < 2 GHz	< -150 dBm, typ. -153 dBm
2 GHz ≤ f < 3.6 GHz	< -147 dBm, typ. -150 dBm
3.6 GHz ≤ f < 13 GHz	< -145 dBm, typ. -148 dBm
13 GHz ≤ f < 18 GHz	< -142 dBm, typ. -145 dBm
18 GHz ≤ f < 25 GHz	< -140 dBm, typ. -143 dBm
25 GHz ≤ f < 32 GHz	< -132 dBm, typ. -135 dBm
32 GHz ≤ f < 40 GHz	< -127 dBm, typ. -130 dBm
40 GHz ≤ f < 46 GHz	< -120 dBm, typ. -123 dBm
46 GHz ≤ f ≤ 50 GHz	< -115 dBm, typ. -118 dBm
	0 dB RF attenuation, 50 Ω termination, log. scaling, normalized to 1 Hz RBW, with R&S®FSMR-B2 option, YIG filter OFF, preamplifier ON RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker
all models	
100 kHz	< -140 dBm
1 MHz	< -150 dBm
10 MHz	< -161 dBm
20 MHz ≤ f < 2 GHz	< -163 dBm, typ. -165 dBm
2 GHz ≤ f < 3.6 GHz	< -161 dBm, typ. -164 dBm
3.6 GHz ≤ f < 22 GHz	< -160 dBm, typ. -163 dBm
22 GHz ≤ f < 26.5 GHz	< -157 dBm, typ. -160 dBm
26.5 GHz ≤ f < 40 GHz	< -155 dBm, typ. -158 dBm
40 GHz ≤ f < 46 GHz	< -145 dBm, typ. -148 dBm
46 GHz ≤ f ≤ 50 GHz	< -142 dBm, typ. -145 dBm

0 dB RF attenuation, 50 Ω termination, log. scaling, normalized to 1 Hz RBW, with R&S®FSMR-B2 option, YIG filter ON, preamplifier OFF f < 10 kHz: 10 Hz FFT filter, trace average, sweep count = 20 f ≥ 10 kHz: RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker	
all models	
20 Hz	< -90 dBm
100 Hz	< -110 dBm
1 kHz	< -120 dBm
10 kHz	< -130 dBm
100 kHz	< -130 dBm
1 MHz	< -140 dBm
10 MHz	< -150 dBm
R&S®FSMR26	
20 MHz ≤ f < 2 GHz	< -151 dBm, typ. -154 dBm
2 GHz ≤ f < 3.6 GHz	< -149 dBm, typ. -152 dBm
3.6 GHz ≤ f < 8 GHz	< -148 dBm, typ. -151 dBm
8 GHz ≤ f < 13 GHz	< -145 dBm, typ. -148 dBm
13 GHz ≤ f < 18 GHz	< -144 dBm, typ. -147 dBm
18 GHz ≤ f < 22 GHz	< -142 dBm, typ. -145 dBm
22 GHz ≤ f < 26.5 GHz	< -138 dBm, typ. -141 dBm
R&S®FSMR43	
20 MHz ≤ f < 2 GHz	< -150 dBm, typ. -153 dBm
2 GHz ≤ f < 3.6 GHz	< -147 dBm, typ. -150 dBm
3.6 GHz ≤ f < 8 GHz	< -145 dBm, typ. -148 dBm
8 GHz ≤ f < 18 GHz	< -142 dBm, typ. -145 dBm
18 GHz ≤ f < 25 GHz	< -138 dBm, typ. -141 dBm
25 GHz ≤ f < 32 GHz	< -130 dBm, typ. -133 dBm
32 GHz ≤ f < 40 GHz	< -125 dBm, typ. -128 dBm
40 GHz ≤ f < 43 GHz	< -115 dBm, typ. -118 dBm
R&S®FSMR50	
20 MHz ≤ f < 2 GHz	< -150 dBm, typ. -153 dBm
2 GHz ≤ f < 3.6 GHz	< -147 dBm, typ. -150 dBm
3.6 GHz ≤ f < 8 GHz	< -145 dBm, typ. -148 dBm
8 GHz ≤ f < 18 GHz	< -142 dBm, typ. -145 dBm
18 GHz ≤ f < 25 GHz	< -138 dBm, typ. -141 dBm
25 GHz ≤ f < 32 GHz	< -130 dBm, typ. -133 dBm
32 GHz ≤ f < 40 GHz	< -125 dBm, typ. -128 dBm
40 GHz ≤ f < 46 GHz	< -115 dBm, typ. -118 dBm
46 GHz ≤ f ≤ 50 GHz	< -110 dBm, typ. -115 dBm
0 dB RF attenuation, 50 Ω termination, log. scaling, normalized to 1 Hz RBW, with R&S®FSMR-B2 option, YIG filter ON, preamplifier ON RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker	
all models	
100 kHz	< -140 dBm
1 MHz	< -150 dBm
10 MHz	< -161 dBm
20 MHz ≤ f < 2 GHz	< -163 dBm, typ. -165 dBm
2 GHz ≤ f < 3.6 GHz	< -161 dBm, typ. -164 dBm
3.6 GHz ≤ f < 26.5 GHz	< -162 dBm, typ. -165 dBm
26.5 GHz ≤ f < 40 GHz	< -155 dBm, typ. -158 dBm
40 GHz ≤ f < 46 GHz	< -145 dBm, typ. -148 dBm
46 GHz ≤ f ≤ 50 GHz	< -142 dBm, typ. -145 dBm

Level measurement uncertainty (spectrum analyzer mode)		
Absolute level uncertainty at 128 MHz	RBW = 10 kHz, level = -30 dBm, reference level = -30 dBm, RF attenuation = 10 dB preamplifier OFF	< 0.2 dB ($\sigma = 0.07$ dB)
	preamplifier ON	< 0.3 dB ($\sigma = 0.1$ dB)
Frequency response referenced to 128 MHz	without R&S®FSMR-B2 option or YIG filter OFF DC coupling, RF attenuation \geq 10 dB, preamplifier ON +20 °C to +30 °C 10 MHz \leq f < 3.6 GHz	< 0.6 dB ($\sigma = 0.2$ dB)
	3.6 GHz \leq f < 8 GHz	< 2 dB ($\sigma = 0.7$ dB)
	8 GHz \leq f < 22 GHz	< 2.5 dB ($\sigma = 0.8$ dB)
	22 GHz \leq f < 40 GHz	< 3 dB ($\sigma = 1.0$ dB)
	40 GHz \leq f < 50 GHz	< 3.5 dB ($\sigma = 1.2$ dB)
	RF attenuation > 40 dB 3.6 GHz \leq f < 40 GHz	add 0.5 dB to above values
	40 GHz \leq f < 50 GHz	add 1 dB to above values
	+5 °C to +45 °C 10 MHz \leq f < 3.6 GHz	< 0.8 dB ($\sigma = 0.3$ dB)
	3.6 GHz \leq f < 8 GHz	< 2.5 dB ($\sigma = 0.8$ dB)
	8 GHz \leq f < 22 GHz	< 3 dB ($\sigma = 1.0$ dB)
	22 GHz \leq f < 26.5 GHz	< 3.5 dB ($\sigma = 1.2$ dB)
	26.5 GHz \leq f < 40 GHz	< 4 dB ($\sigma = 1.3$ dB)
	40 GHz \leq f < 50 GHz	< 4.5 dB ($\sigma = 1.5$ dB)
	RF attenuation > 40 dB 3.6 GHz \leq f < 40 GHz	add 0.5 dB to above values
	40 GHz \leq f < 50 GHz	add 1.5 dB to above values
	with R&S®FSMR-B2 option, YIG filter ON DC coupling, RF attenuation \geq 10 dB, preamplifier ON +20 °C to +30 °C 10 MHz \leq f < 3.6 GHz	< 0.6 dB ($\sigma = 0.2$ dB)
	3.6 GHz \leq f < 8 GHz, span < 1 GHz	< 2.5 dB ($\sigma = 0.8$ dB)
	8 GHz \leq f < 22 GHz, span < 1 GHz	< 3 dB ($\sigma = 1.0$ dB)
	22 GHz \leq f < 40 GHz, span < 1 GHz	< 3.5 dB ($\sigma = 1.2$ dB)
	40 GHz \leq f < 50 GHz, span < 1 GHz	< 4 dB ($\sigma = 1.3$ dB)
	RF attenuation > 40 dB or span \geq 1 GHz 3.6 GHz \leq f < 40 GHz	add 0.5 dB to above values
	40 GHz \leq f < 50 GHz	add 1 dB to above values
	+5 °C to +45 °C 10 MHz \leq f < 3.6 GHz	< 0.8 dB ($\sigma = 0.3$ dB)
	3.6 GHz \leq f < 8 GHz, span < 1 GHz	< 3 dB ($\sigma = 1.0$ dB)
	8 GHz \leq f < 22 GHz, span < 1 GHz	< 3.5 dB ($\sigma = 1.2$ dB)
	22 GHz \leq f < 26.5 GHz, span < 1 GHz	< 4 dB ($\sigma = 1.3$ dB)
	26.5 GHz \leq f < 40 GHz, span < 1 GHz	< 4.5 dB ($\sigma = 1.5$ dB)
	40 GHz \leq f < 50 GHz, span < 1 GHz	< 5 dB ($\sigma = 1.7$ dB)
	RF attenuation > 40 dB or span \geq 1 GHz 3.6 GHz \leq f < 40 GHz	add 0.5 dB to above values
	40 GHz \leq f < 50 GHz	add 1.5 dB to above values

R&S®FSU-B25 electronic attenuator and preamplifier

Frequency		
Frequency range		100 kHz to 3.6 GHz
Setting range		
Electronic attenuator		0 dB to 30 dB, in 5 dB steps
Preamplifier		20 dB, switchable
Level measurement uncertainty (spectrum analyzer mode)		
Frequency response	with preamplifier or electronic attenuator	
	10 MHz to 50 MHz	< 1 dB ($\sigma = 0.34$ dB)
	50 MHz to 3.6 GHz	< 0.6 dB ($\sigma = 0.2$ dB)
Reference error	at 128 MHz, RBW \leq 100 kHz, reference level = -30 dBm, RF attenuation = 10 dB	
	electronic attenuator	< 0.3 dB ($\sigma = 0.1$ dB)
	preamplifier	< 0.3 dB ($\sigma = 0.1$ dB)
Displayed average noise level (spectrum analyzer mode)		
0 dB RF attenuation, 50 Ω termination, log. scaling, normalized to 1 Hz RBW RBW = 1 kHz, VBW = 3 kHz, span = 0 Hz, sweep time = 50 ms, trace average, sample detector, sweep count = 20, mean marker preamplifier ON R&S®FSMR3, R&S®FSMR26 10 MHz to 2.0 GHz < -162 dBm 2.0 GHz to 3.6 GHz < -160 dBm R&S®FSMR43, R&S®FSMR50 10 MHz to 40 MHz < -160 dBm 40 MHz to 2 GHz < -162 dBm 2 GHz to 3.6 GHz < -160 dBm when the R&S®FSU-B25 option is built in, the average noise level values displayed by the base unit degrade as follows preamplifier OFF, electronic attenuator OFF 20 Hz to 3.6 GHz 1 dB preamplifier OFF, electronic attenuator 0 dB 20 Hz to 3.6 GHz typ. 2.5 dB		
Intermodulation (spectrum analyzer mode)		
Third-order intercept point (TOI)	preamplifier OFF, electronic attenuator ON, $\Delta f > 5 \times$ RBW or 10 kHz	
	10 MHz $\leq f_{in} \leq$ 300 MHz	> 17 dBm
	300 MHz $< f_{in} \leq$ 3.6 GHz	> 20 dBm

Accessories

R&S®NRP-Z27/-Z37 power sensor modules

This section contains information about the R&S®NRP-Z27 and R&S®NRP-Z37 power sensor modules when used alone or with an R&S®NRP2 power meter base unit. For specifications of the other R&S®NRP-Zxx power sensors, see the R&S®NRP2 and R&S®NRP-Zxx data sheet (PD 5213.5539.22).

Sensor type	thermoelectric power sensor with RF signal output (power splitter)			
Frequency range	R&S®NRP-Z27		DC to 18 GHz	
	R&S®NRP-Z37		DC to 26.5 GHz	
Power range			–24 dBm (4 µW) to +26 dBm (400 mW) without subranges	
Max. power	average	0.5 W (+27 dBm) continuous 1.0 W (+30 dBm) for max. 10 minutes		
	pulse energy	30 µWs		
Input VSWR	RF signal output connected to the R&S®FSMR	R&S®NRP-Z27	R&S®NRP-Z37	
	DC to 2 GHz	< 1.15	< 1.15	
	> 2 GHz to 4.2 GHz	< 1.18	< 1.18	
	> 4.2 GHz to 8 GHz	< 1.23	< 1.23	
	> 8 GHz to 12.4 GHz	< 1.25	< 1.25	
	> 12.4 GHz to 18 GHz	< 1.35	< 1.30	
	> 18 GHz to 26.5 GHz	–	< 1.45	
Display noise	two standard deviations, 10.24 s integration time	< 240 nW (typ. 120 nW)		
Zero offset	expanded uncertainty ($k = 2$) after zeroing	< 400 nW (typ. 200 nW)		
Zero drift	within 1 hour after zeroing, permissible temperature change $\pm 1^{\circ}\text{C}$, following two-hour warm-up of power sensor	< 160 nW		
Linearity	for relative measurements referenced to 0 dBm			
	input power			
	< 0.1 W	< 0.02 dB		
Calibration uncertainty	> 0.1 W	< 0.03 dB		
	0 dBm calibration level; at calibration frequencies from 100 MHz to upper frequency limit, temperature: $+20^{\circ}\text{C}$ to $+25^{\circ}\text{C}$; specifications include zero offset and display noise (up to a 2σ value of 0.004 dB); the RF signal output must be terminated with a precision load (VSWR < 1.05); expanded uncertainty ($k = 2$); calibration frequencies: 0.1/0.5/1.3/5/10/50/100 MHz; from 100 MHz to the upper frequency limit in increments of 100 MHz			
	DC to 100 MHz	0.063 dB		
	> 100 MHz to 4 GHz	0.070 dB		
	> 4 GHz to 8 GHz	0.082 dB		
	> 8 GHz to 12.4 GHz	0.088 dB		
	> 12.4 GHz to 18 GHz	0.109 dB		
	> 18 GHz to 26.5 GHz	0.118 dB		
Uncertainty for absolute power measurement with matched load on RF output connector (VSWR < 1.05)	RF level: –10 dBm to +26 dBm	expanded uncertainty ($k = 2$)		
	At the calibration frequencies, the effects of calibration uncertainty, linearity, zero offset and drift, temperature and display noise (up to a value of 0.01 dB) as well as mismatch of the load on the RF signal output are included. For power levels below –10 dBm, the effect of zero offset must be calculated separately.	+20 °C to +25 °C	+15 °C to +35 °C	0 °C to +50 °C
	DC to 100 MHz	0.070 dB	0.077 dB	0.103 dB
	> 100 MHz to 4.2 GHz	0.075 dB	0.082 dB	0.106 dB
	> 4.2 GHz to 8 GHz	0.087 dB	0.094 dB	0.119 dB
	> 8 GHz to 12.4 GHz	0.093 dB	0.101 dB	0.130 dB
	> 12.4 GHz to 18 GHz	0.112 dB	0.121 dB	0.151 dB
	> 18 GHz to 26.5 GHz	0.122 dB	0.137 dB	0.190 dB

Averaging filter	modes	AUTO OFF (fixed averaging factor) AUTO ON (continuously auto-adapted)
	normal operating mode	setting of filter depends on power to be measured and resolution
	resolution	1/0.1/0.01/0.001 dB
	fixed noise operating mode	filter set to specified noise content
	noise content	0.0001 dB to 1 dB
	max. measurement time	0.01 s to 1000 s
	averaging factor N	1 to 2^{16} (number of averages)
	result output	
	moving average	continuous with every newly evaluated measurement window
	repeat	only final result (in case of remote control)
Measurement window	duration	$2 \times (1 \text{ ms to } 300 \text{ ms})$
	shape	rectangular (integrating behavior) Von Hann (smoothing filter, for efficient suppression of result variations due to modulation)
Measurement time	for single measurement mode	$N \times (\text{duration of measurement window} + 0.5 \text{ ms}) + 82 \text{ ms}$
Isolation	between RF signal output and input of the power sensor; values in parentheses represent effective isolation, which can be achieved after numeric isolation correction of the measurement result inside the sensor (VSWR correction active in the R&S®FSMR)	
	DC to 2 GHz	> 23 (51) dB
	> 2 GHz to 12.4 GHz	> 25 (37) dB
	> 12.4 GHz to 18 GHz	> 26 (35) dB
	> 18 GHz to 26.5 GHz	> 26 (32) dB
Insertion loss from input to RF output	DC to 2 GHz	< 14 dB (typ. 12.5 dB)
	> 2 GHz to 4.2 GHz	< 15 dB (typ. 13.5 dB)
	> 4.2 GHz to 8 GHz	< 16 dB (typ. 14.0 dB)
	> 8 GHz to 12.4 GHz	< 17 dB (typ. 14.5 dB)
	> 12.4 GHz to 18 GHz	< 18 dB (typ. 15.5 dB)
	> 18 GHz to 26.5 GHz	< 19 dB (typ. 16.5 dB)
Impedance		50 Ω
RF input connector	R&S®NRP-Z27	N male
	R&S®NRP-Z37	3.5 mm male
RF output connector (cable to the R&S®FSMR)		3.5 mm male

General data

Temperature	operating temperature range storage temperature range	0° C to +55 °C –40°C to +70 °C
Climatic resistance		in line with IEC 60068 with restrictions: non-condensing, +25 °C/+40 °C cyclic at 95 % relative humidity
Mechanical resistance		
Vibration	sinusoidal	5 Hz to 55 Hz, max. 2 g 55 Hz to 150 Hz, 0.5 g constant, in line with IEC 60068
	random	10 Hz to 500 Hz, 1.9 g (RMS), in line with IEC 60068
Shock		40 g shock spectrum, in line with IEC 60068
Air pressure	operation transport	795 hPa (2000 m) to 1060 hPa 566 hPa (4500 m) to 1060 hPa
Electromagnetic compatibility		in line with EN 61326, EN 55011
Safety		in line with EN 61010-1
Test mark		VDE, GS, CSA, CSA-NRTL
Dimensions (W × H × D)	sensor dimensions	48 mm × 50 mm × 250 mm (1.89 in. × 1.97 in × 9.84 in)
	connecting cable length	1.5 m (59.06 in)
Weight	R&S®NRP-Z27/-Z37	0.7 kg (1.54 lb)

R&S®FSMR-Z2 attenuation calibration kit

Coaxial attenuators with calibration certificate issued by Physikalisch-Technische Bundesanstalt (PTB) in Braunschweig. The calibration covers the unit attenuation for four attenuators with nominal values of 6 dB, 10 dB and 20 dB.

Two additional attenuators with 6 dB (nom.) each are included. These attenuators have equal quality but are not certified.

Connector (input/output)		N male/N female
Impedance		50 Ω
Frequency range		DC to 18 GHz
Maximum load	temperature = +25 °C	0.5 W
Attenuation		
Number of attenuators	nominal attenuation value	
3		6 dB
1		10 dB
2		20 dB
Maximum deviation from nominal value	frequency = 30.02 MHz	±0.5 dB
Reproducibility		
Maximum attenuation error from average due to connector rotation	frequency = 30.02 MHz	≤ 0.003 dB
VSWR	frequency = 30.02 MHz	typ. ≤ 1.01
Uncertainty of calibration		
Expanded uncertainty ($k = 2$) of attenuation values stated in calibration certificate	temperature = +25 °C, frequency = 30.02 MHz 6 dB, 10 dB attenuator 20 dB attenuator	0.002 dB 0.003 dB

Ordering information

Base unit

Designation	Type	Order No.
Measuring Receiver, 20 Hz to 3.6 GHz	R&S®FSMR3	1313.9200.03
Measuring Receiver, 20 Hz to 26.5 GHz	R&S®FSMR26	1313.9200.26
Measuring Receiver, 20 Hz to 43 GHz	R&S®FSMR43	1313.9200.43
Measuring Receiver, 20 Hz to 50 GHz	R&S®FSMR50	1313.9200.50

Accessories supplied
Power cable, printed Quick Start Guide, CD-ROM (with operating manual and service manual)
R&S®FSMR3: SMA adapter (4012.5837.00)
R&S®FSMR26: test port adapter with 3.5 mm female (1021.0512.00) and N female (1021.0535.00) connector
R&S®FSMR43: test port adapter with 2.92 mm (K) female (1036.4790.00) and N female (1036.4777.00) connector
R&S®FSMR50: test port adapter with 2.4 mm female (1088.1627.02), 2.92 mm (K) female (1036.4790.00) and N female (1036.4777.00) connector

Hardware options

Designation	Type	Order No.	Retrofittable	Remarks
YIG Preselection, 3.6 GHz to 26.5 GHz	R&S®FSMR-B2	1157.1903.26	no	not with R&S®FSMR-B23 and R&S®FSMR-B223, for R&S®FSMR26
YIG Preselection, 3.6 GHz to 26.5 GHz	R&S®FSMR-B2	1157.1903.43	no	not with R&S®FSMR-B23 and R&S®FSMR-B223, for R&S®FSMR26
YIG Preselection with 20 dB Preamplifier, 3.6 GHz to 26.5 GHz	R&S®FSMR-B223	1157.1955.26	no	not with R&S®FSMR-B23 and R&S®FSMR-B2, for R&S®FSMR26
YIG Preselection, 3.6 GHz to 50 GHz	R&S®FSMR-B2	1157.1903.50	no	for R&S®FSMR50 only
Low-Aging OXCO	R&S®FSU-B4	1144.9000.02	yes	
Tracking Generator, 100 kHz to 3.6 GHz	R&S®FSU-B9	1142.8994.02	yes	
Attenuator for Tracking Generator	R&S®FSU-B12	1142.9349.02	yes	
Removable Hard Disk	R&S®FSMR-B18	1145.0242.06	no	
Second Hard Disk	R&S®FSMR-B19	1145.0394.06		requires R&S®FSMR-B18
RF Preamplifier, 3.6 GHz to 26 GHz	R&S®FSMR-B23	1157.0907.05	no	requires R&S®FSU-B25, not with R&S®FSMR-B2 and R&S®FSMR-B223, for R&S®FSMR26 only
Vector Signal Analyzer	R&S®FSMR-B73	1169.5696.02		
20 dB RF Preamplifier and Electronic Attenuator, 100 kHz to 3.6 GHz	R&S®FSU-B24	1157.2100.50	yes	requires R&S®FSU-B25, not with R&S®FSMR-B25 and R&S®FSMR-B223, not for R&S®FSMR3
20 dB RF Preamplifier and Electronic Attenuator, 100 kHz to 3.6 GHz	R&S®FSU-B25	1144.9298.02	yes	
Attenuation Calibration Kit	R&S®FSMR-Z2	1169.4954.02	yes	
N-Type Adapter for R&S®RT-Zx Probes	R&S®RT-ZA9	1417.0909.02	yes	

Software options

Designation	Type	Order No.	Retrofittable	Remarks
VOR/ILS Measurement Demodulator	R&S®FS-K15	1302.0936.02		
Application Firmware for Noise Figure and Gain Measurements	R&S®FS-K30	1300.6508.02		retrofittable only for serial no.> 200000; preamplifier (e.g. R&S®FSU-B25) recommended
Application Firmware for Phase Noise Measurement	R&S®FS-K40	1161.8138.02		
GSM/EDGE Application Firmware	R&S®FS-K5	1141.1496.02		
3GPP BTS/NodeB FDD Application Firmware	R&S®FS-K72	1154.7000.02		
3GPP UE FDD Application Firmware	R&S®FS-K73	1154.7252.02		
3GPP HSDPA BTS Application Firmware	R&S®FS-K74	1300.7156.02		
3GPP TD-SCDMA BTS Application Firmware	R&S®FS-K76	1300.7291.02		
3GPP TD-SCDMA UE Application Firmware	R&S®FS-K77	1300.8100.02		
CDMA2000® BTS Application Firmware	R&S®FS-K82	1157.2316.02		
CDMA2000® MS Application Firmware (incl. 1xEV-DV)	R&S®FS-K83	1157.2416.02		
CDMA2000® 1xEV-DO BTS Application Firmware	R&S®FS-K84	1157.2851.02		
CDMA2000® 1xEV-DO MS Application Firmware	R&S®FS-K85	1300.6689.02		

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

Accessories

Designation	Type	Order No.
Power Sensor Modules with integrated splitter		
DC to 18 GHz, N connector	R&S®NRP-Z27	1169.4102.02
DC to 26.5 GHz, PC 3.5 mm connector	R&S®NRP-Z37	1169.3206.02
Thermal Power Sensors		
DC to 18 GHz, N connector	R&S®NRP-Z51	1138.0005.02
DC to 40 GHz, K connector	R&S®NRP-Z55	1138.2008.02
DC to 50 GHz, 2.4 mm connector	R&S®NRP-Z56	1171.8201.02
DC to 67 GHz, 1.85 mm connector	R&S®NRP-Z57	1171.8401.02
Diode Power Sensors		
10 MHz to 8 GHz	R&S®NRP-Z11	1138.3004.02
10 MHz to 18 GHz	R&S®NRP-Z21	1137.6000.02
10 MHz to 18 GHz, medium power	R&S®NRP-Z22	1137.7506.02
10 MHz to 18 GHz, medium power	R&S®NRP-Z23	1137.8002.02
10 MHz to 18 GHz, medium power	R&S®NRP-Z24	1137.8502.02
9 kHz to 6 GHz	R&S®NRP-Z91	1168.8004.02
For specifications of the other R&S®NRP-Zxx power sensors, see the R&S®NRP2 and R&S®NRP-Zxx data sheet (PD 5213.5539.22).		
Accessories for calibrating the RF level uncertainty of the R&S®FSMR		
Attenuation Calibration Kit	R&S®FSMR-Z2	1169.4954.02

Recommended extras

Designation	Type	Order No.
Headphones		0708.9010.00
IEC/IEEE Bus Cable, length 1 m	R&S®PCK	0292.2013.10
IEC/IEEE Bus Cable, length 2 m	R&S®PCK	0292.2013.20
19" Rack Adapter	R&S®ZZA-411	1096.3283.00
Adapter for mounting on telescopic rails (only with R&S®ZZA-411 19" rack adapter)	R&S®ZZA-T45	1109.3774.00
Matching Pads, 50/75 Ω		
L section, matching at both ends	R&S®RAM	0358.5414.02
Series resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
SWR bridges, 50 Ω		
SWR Bridge, 5 MHz to 3 GHz	R&S®ZRB2	0373.9017.5X
SWR Bridge, 40 kHz to 4 GHz	R&S®ZRC	1039.9492.5X
High-Power Attenuators		
100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.XX (XX = 03/06/10/20/30)
50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.XX (XX = 03/06/10/20/30)
50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
Connectors and cables		
N-Type Adapter for R&S®RT-Zx Probes	R&S®RT-ZA9	1417.0909.02
Probe power connector, 3-pin		1065.9480.00
DC blocks		
DC Block, 10 kHz to 18 GHz (type N)	R&S®FSE-Z4	1084.7443.02
For the R&S®FSMR26 only		
Test port adapter, N male		1021.0541.00
Test port adapter, 3.5 mm male		1021.0529.00
Microwave Measurement Cable, with test port adapter set, N male and 3.5 mm male	R&S®FSE-Z15	1046.2002.02
For the R&S®FSMR43, R&S®FSMR50 only		
Test port adapter, N male		1036.4783.00
Test port adapter, K female		1036.4790.00
Test port adapter, K male		1036.4802.00

Service options		
Two-Year Calibration Service	R&S®CO2FSMR	Please contact your local Rohde & Schwarz sales office.
Three-Year Calibration Service	R&S®CO3FSMR	
Five-Year Calibration Service	R&S®CO5FSMR	
One-Year Repair Service following the warranty period	R&S®RO2FSMR	
Two-Year Repair Service following the warranty period	R&S®RO3FSMR	
Four-Year Repair Service following the warranty period	R&S®RO5FSMR	

For product brochure, see PD 0758.2319.12 and www.rohde-schwarz.com

Service you can rely on

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established more than 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

Environmental commitment

- | Energy-efficient products
- | Continuous improvement in environmental sustainability
- | ISO 14001-certified environmental management system

Certified Quality System
ISO 9001

Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Regional contact

- | Europe, Africa, Middle East
+49 89 4129 123 45
customersupport@rohde-schwarz.com
- | North America
1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- | Latin America
+1 410 910 79 88
customersupport.la@rohde-schwarz.com
- | Asia/Pacific
+65 65 13 04 88
customersupport.asia@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners | Printed in Germany (sk)

PD 0758.2319.22 | Version 09.00 | July 2011 | R&S®FSMR

Subject to change

© 2005 - 2011 Rohde & Schwarz GmbH & Co. KG | 81671 München, Germany



0758231922